

CMS-TOTEM Precision Proton Spectrometer

Michele Gallinaro


LIP Lisbon

December 18, 2014



- ✓ Physics motivation
- ✓ Expected performance
- ✓ Beam pockets
- ✓ Tracking and timing detectors
- ✓ Planning and summary

Introduction

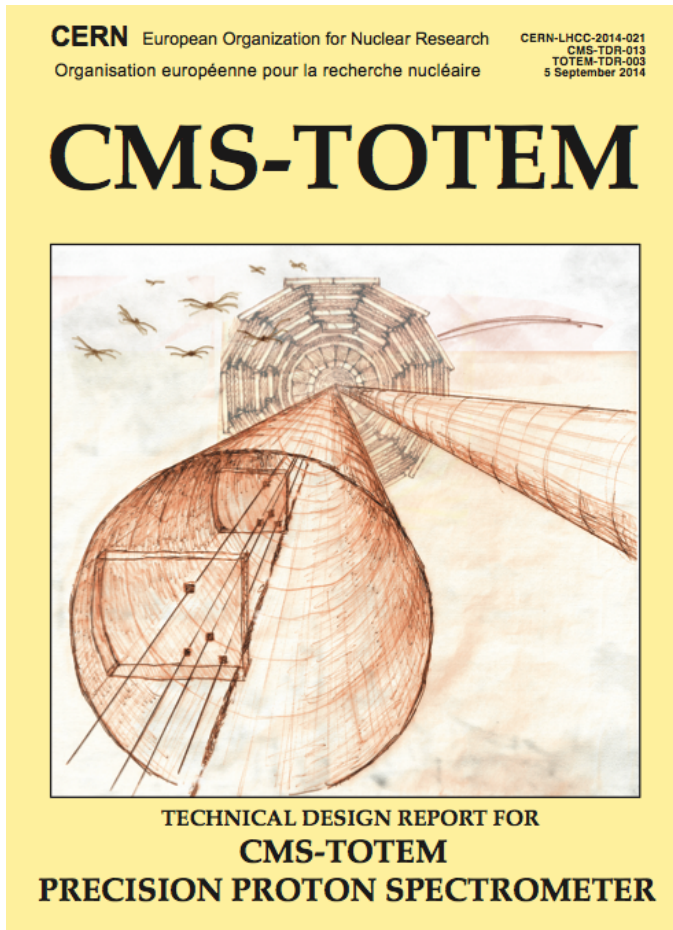


- Sep. 2013: CMS approves PPS program
- Dec. 2013: Approval of CMS-TOTEM MoU
- Sep. 2014: TDR published
 - baseline design and alternative future solutions
- Dec. 2014: Project approved by LHCC

<https://indico.cern.ch/event/334693/>


Detector concept

- The CMS-Totem Precision Proton Spectrometer (CT-PPS) will allow precision proton measurement in the very forward region on both sides of CMS in standard LHC running conditions
- Proton spectrometer uses **machine magnets** to bend protons
- Two stations for **tracking detectors** and two stations for **timing detectors** installed at ~205-215 m from the IP (on both sides)

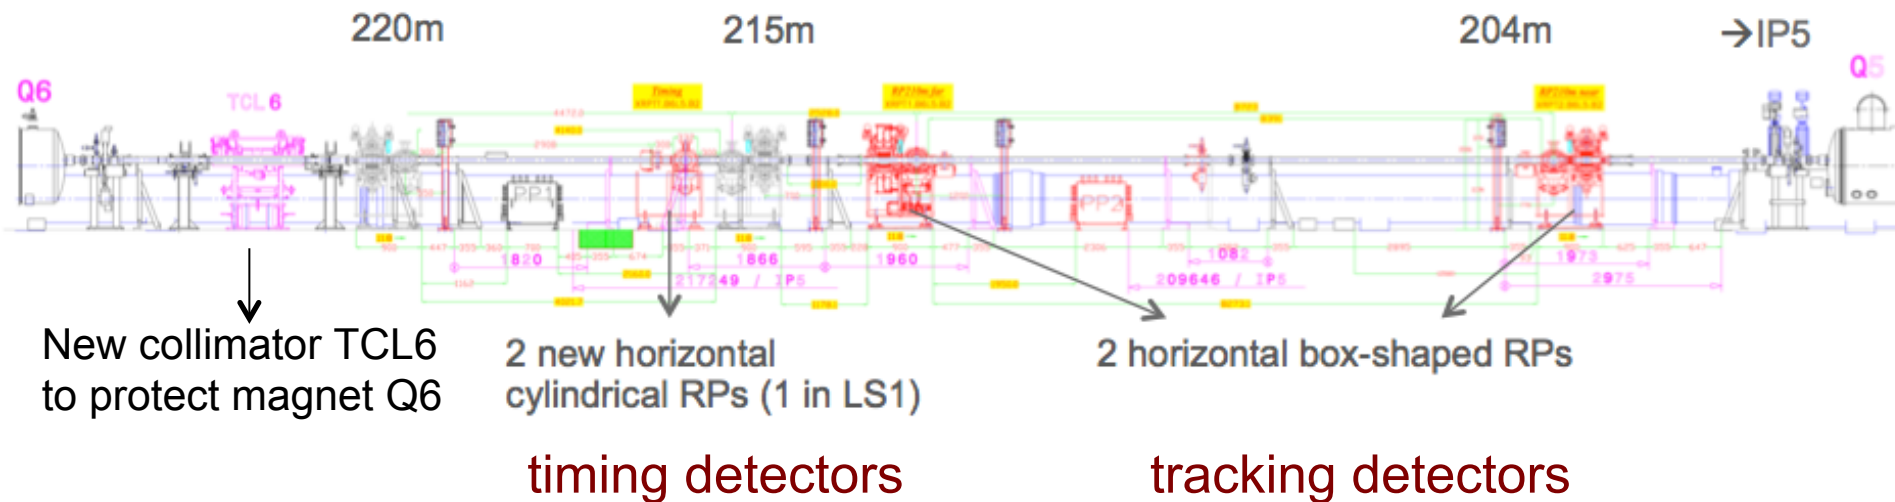

Experimental challenges

- Ability to operate the detectors close to beam ($15\text{-}20\sigma$) to maximize acceptance for low momentum loss (ξ) protons
- Limit **RF impedance** introduced by beam pockets
 - RPs improved RF shielding
 - R&D on Movable Beam Pipe as future option
- Sustain **high radiation levels**
 - For 100/fb, proton flux up to $5 \times 10^{15} \text{cm}^{-2}$ in tracking detectors, $10^{12} n_{\text{eq}}/\text{cm}^2$ and 10Gy in photosensors and readout electronics
- Reject background in the **high-pileup** ($\mu=50$) of normal LHC running

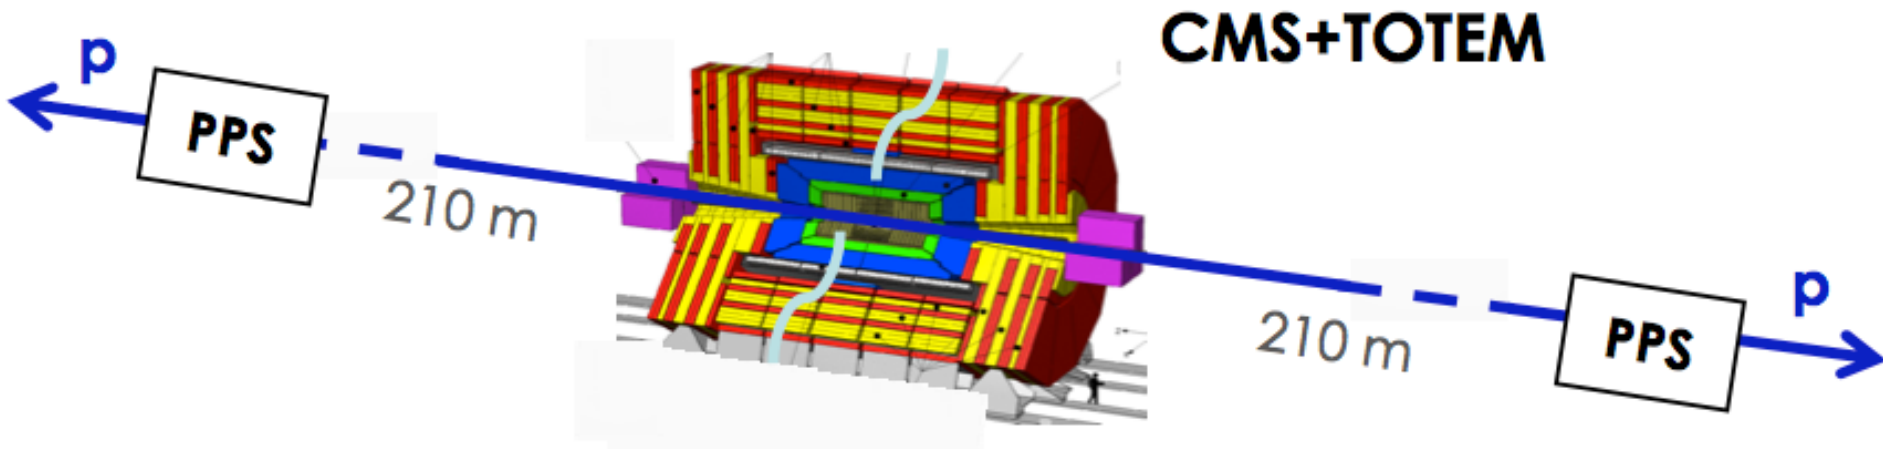

Central Exclusive Production (CEP)

$$pp \rightarrow p + X + p$$

X is a state measured in the central region

X : $\mu^+\mu^-$, Z , H , ZZ , jets


$+$: rapidity gap

i, j : only photon and gluon exchanges are allowed

4-momentum of X fully constrained by the two proton kinematics

ξ : proton fractional momentum loss

t : 4-momentum transferred squared

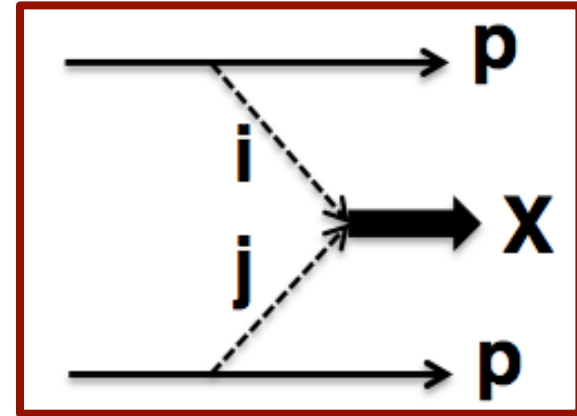

Physics motivations

- LHC used as photon-photon collider
 - Measure $\gamma\gamma \rightarrow W^+W^-, e^+e^-, \mu^+\mu^-, \tau^+\tau^-$
 - Search for AQGC with improved sensitivity
 - Search for SM forbidden $ZZ\gamma\gamma, \gamma\gamma\gamma\gamma$ couplings
- QCD physics
 - Exclusive 2- and 3-jet events, M up to $\sim 700\text{--}800$ GeV
 - Tests of pQCD mechanisms of exclusive production
- Gluon jet factory
 - Gluon jet samples with small component of quark jets
- Search for new resonances in CEP
 - Clean events (no underlying pp event)
 - Independent mass measurement from pp system
 - J^{PC} quantum numbers $0^{++}, 2^{++}$

Main issues addressed


- Physics performance at high luminosity ($2 \times 10^{34} \text{ cm}^{-2} \text{ s}^{-1}$)
 - background from pileup/beam
- Detector operation close to the beam
 - RP and MBP expected performance
 - RF impedance, showers originated in the detectors
- Radiation levels
 - In detector and front-end electronics
- Timing detectors
 - 10/30 ps
- Tracking detectors
 - $10 \mu\text{m}$, $1 \mu\text{rad}$, $5 \times 10^{15} \text{ protons cm}^{-2}$

Detector and physics performance

Simulation


- Generated events are processed through GEANT4 simulation of CMS central detector, and standard reconstruction chain
- Protons are tracked through the beam-line to tracking and timing detector position
 - Simulation includes beam energy dispersion, beam crossing angle, smearing due to beam divergence, vertex smearing
- Fast simulation of PPS detectors takes into account detector segmentation and resolution
 - Time resolution of 10ps (baseline) and 30ps (conservative) considered
 - Tracking detectors: position resolution of $10\mu\text{m}$ at $z=204\text{-}214\text{m}$
- Beam induced background is included
 - Simulated event-by-event simulation based on data at $\text{PU}=9$ and extrapolated to $\text{PU}=25,50$

Beam optics

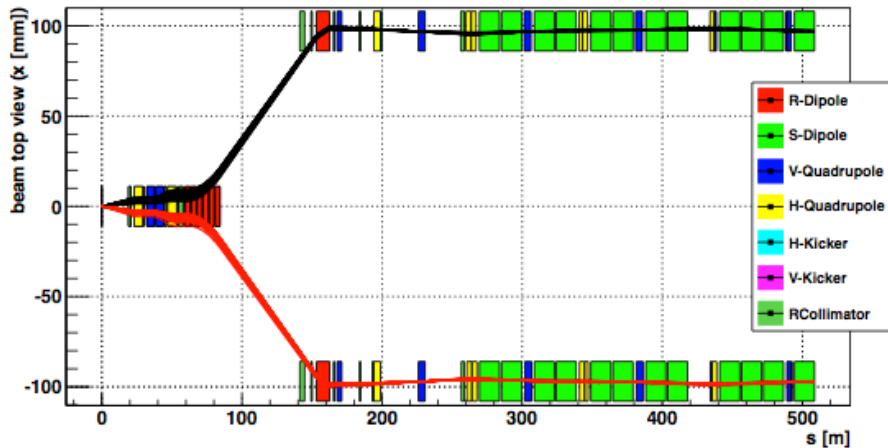

Horizontal distance to beam center
in the z-range of the PPS detectors

- HECTOR, a fast simulator for particle transport in a beam-line
- good agreement with MADx
- Full transport line simulation in CMSSW

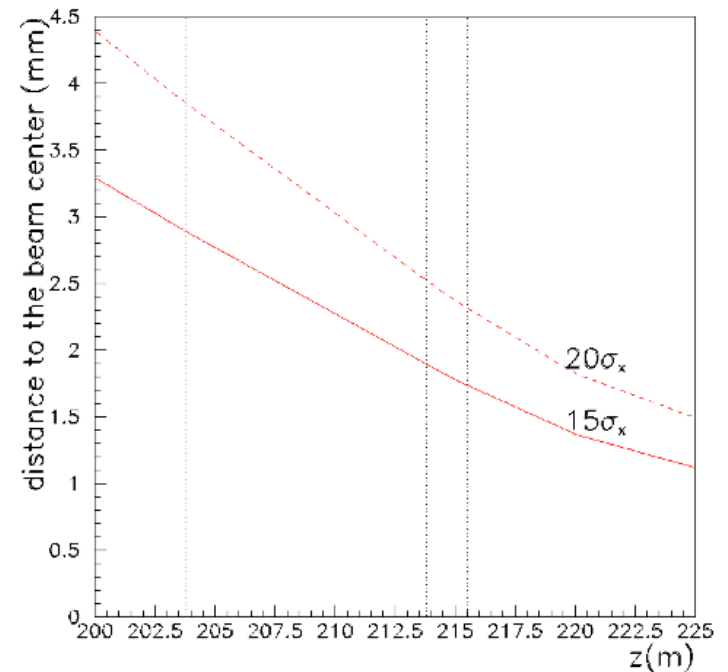


Detector acceptance


Acceptance: X vs Y (includes ξ, t ellipses)

- Particle gun (t, ξ, ϕ) based on HECTOR at $\sqrt{s} = 13$ TeV

$z=204\text{m}$ (X axis of CMS)




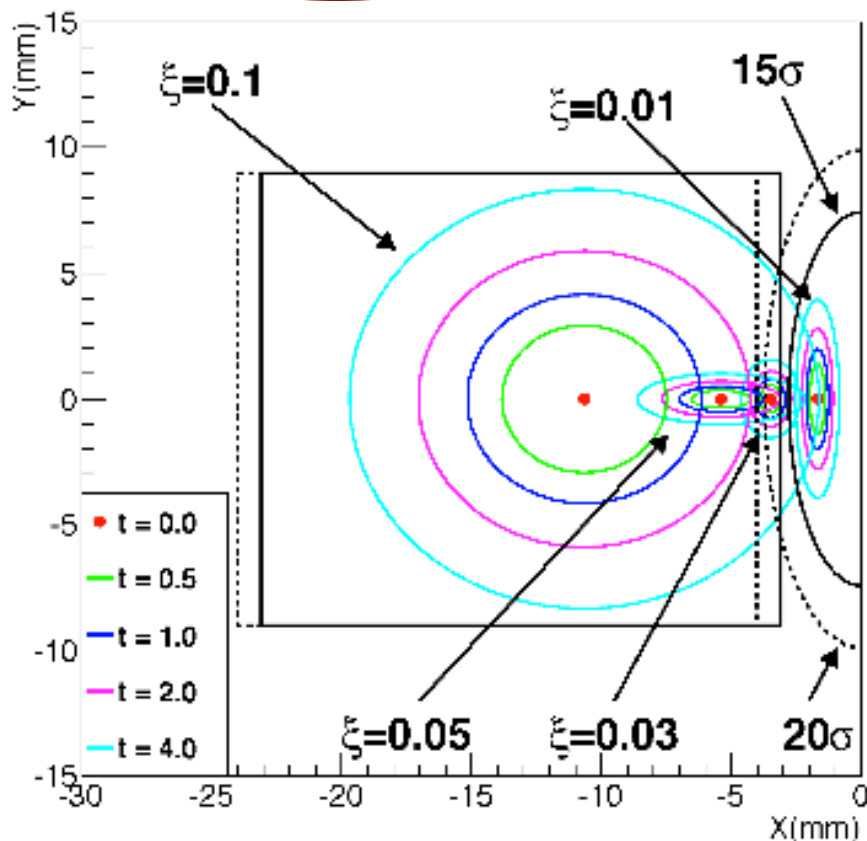


$z=215\text{m}$ (X axis of CMS)

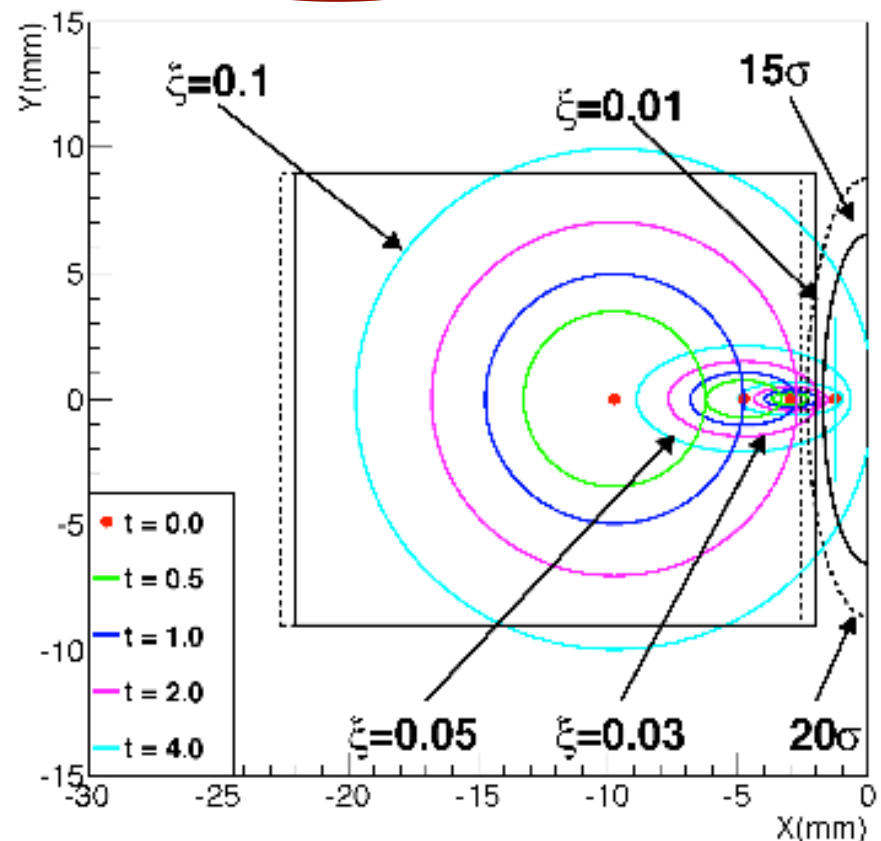





Detector resolution: t , ξ

- Compare generated and reconstructed values
- Resolution of the t and ξ variables

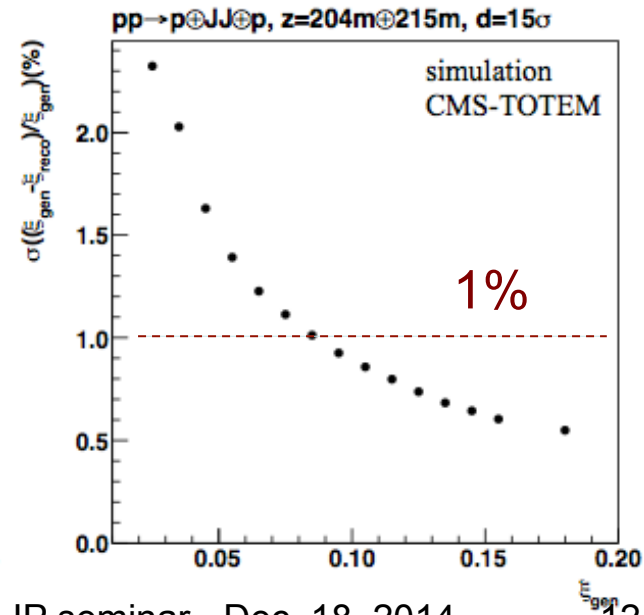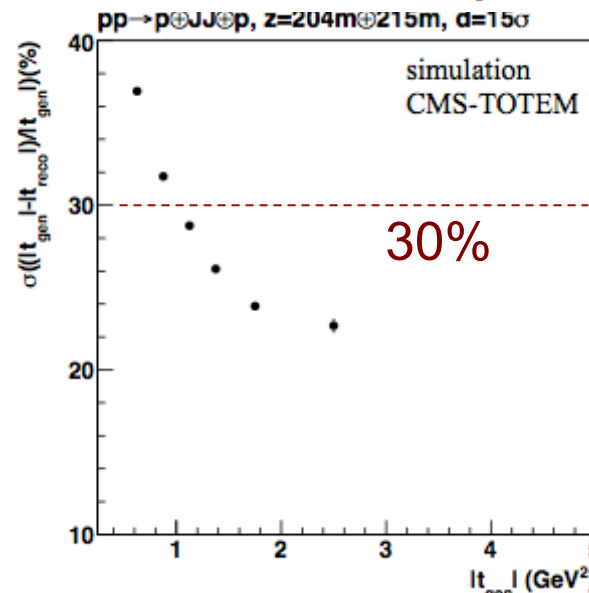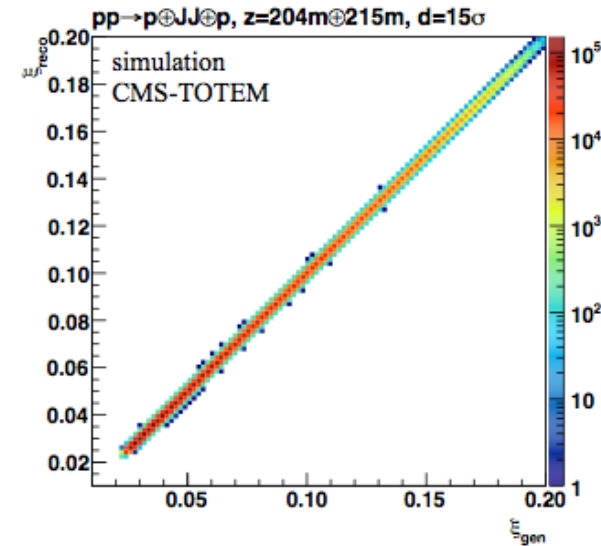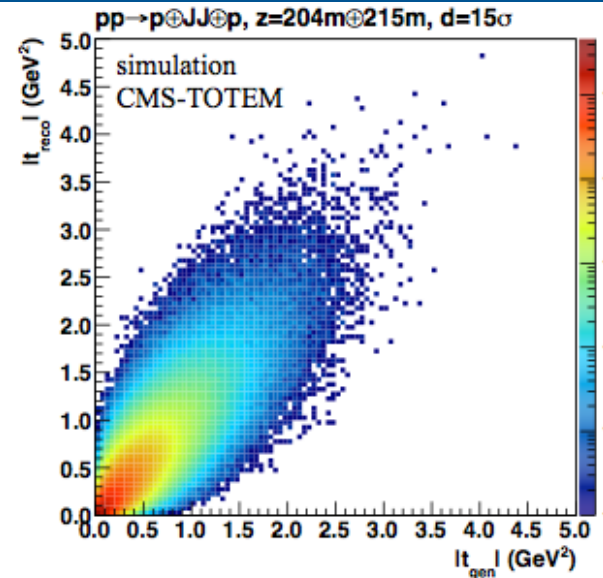


Detector resolution: mass

- Mass acceptance and resolution vs M_X
- PPS selects exclusive systems in 300-1700 GeV range ($\varepsilon > 5\%$)
- At 15σ acceptance larger by a factor of two (wrt 20σ) for lower masses
- Mass resolution $\sim 1.5\%$ at 500 GeV

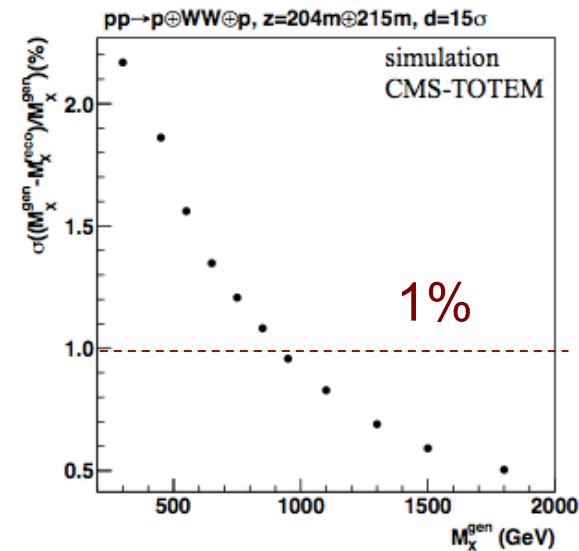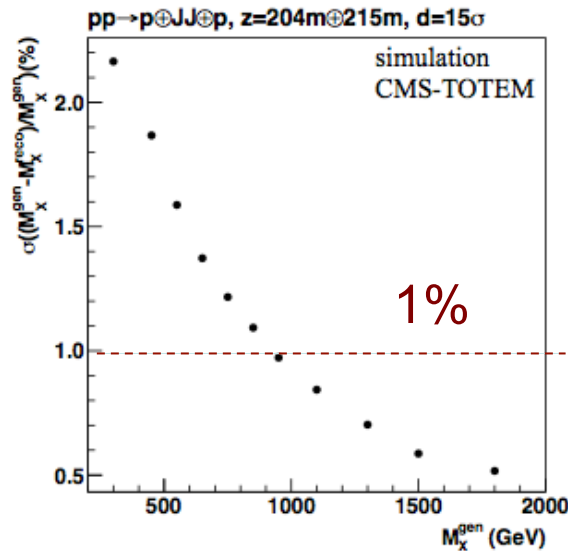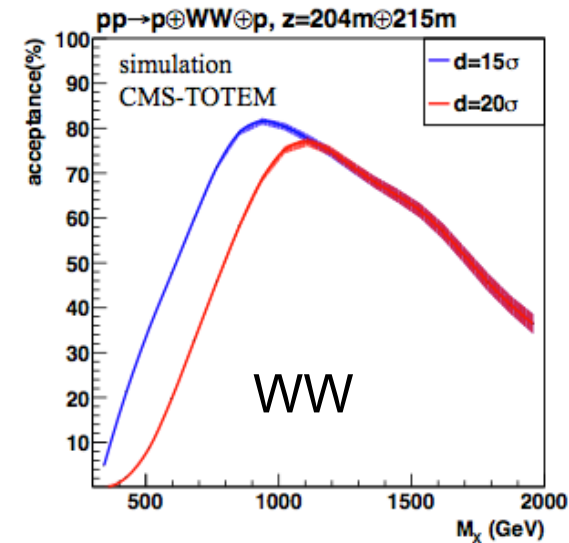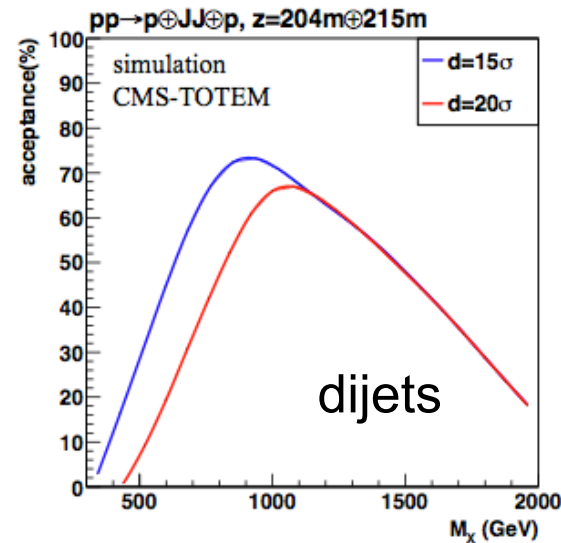


Physics processes

- **Exclusive dijets**
 - high jet p_T events (M_{jj} up to ~ 400 -500 GeV)
 - test of pQCD mechanism of exclusive production
- **Exclusive WW**
 - quartic gauge boson coupling $WW\gamma\gamma$
 - sensitivity to anomalous couplings




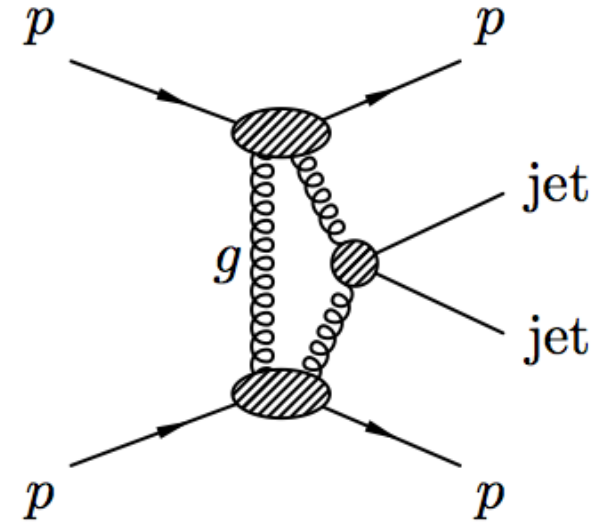


Exclusive dijets



- Require 2 jets ($p_T > 100$ GeV, $|\eta| < 2$)
- Leading protons tagged by PPS
- Sensitivity to high mass of central system M_X (from PPS)
- Timing as powerful discriminant for exclusive states
- Kinematical constraints from PPS measurements
- Signal: ExHuME ($pp \rightarrow gg \rightarrow \text{dijets}$)
- PU: Pythia 8 (MB, PU50, PU25)

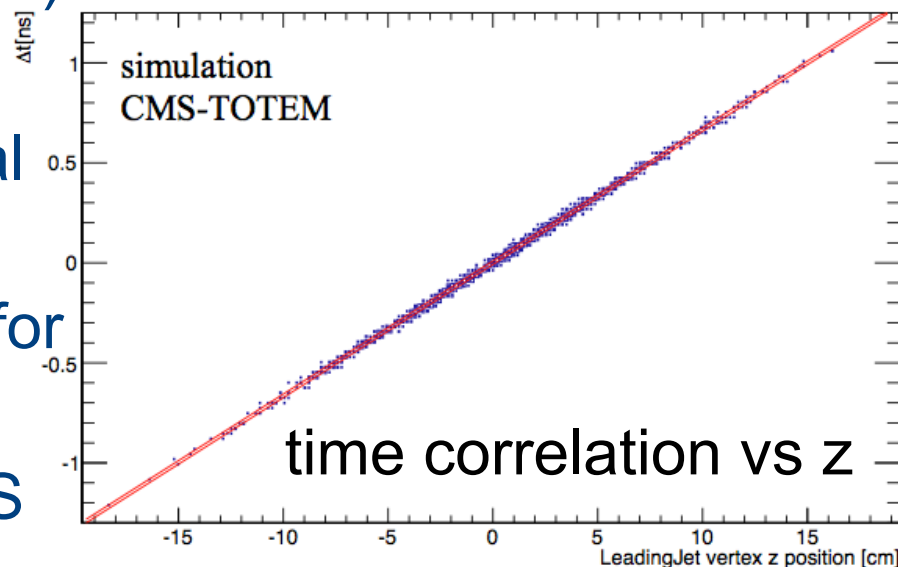

Kinematical distributions

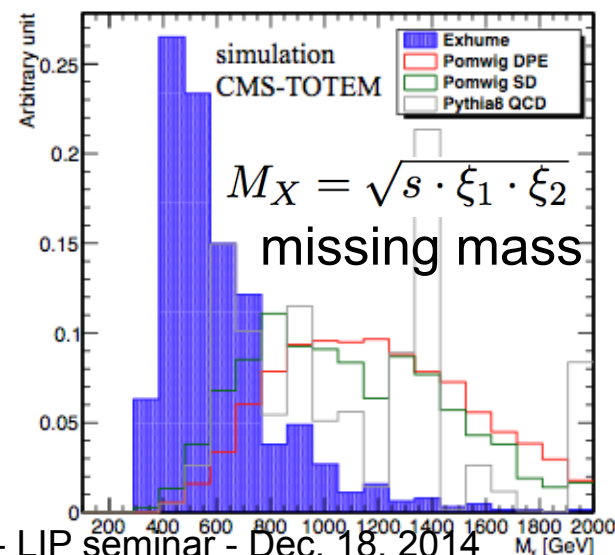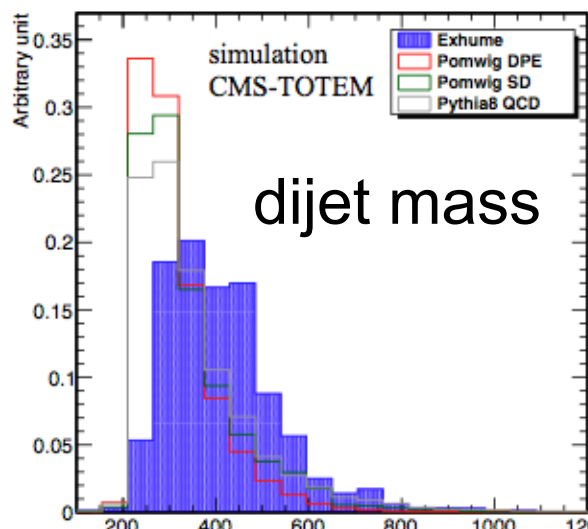
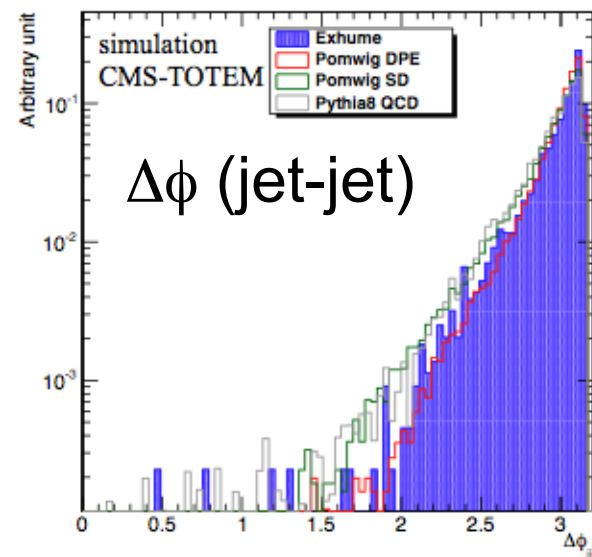
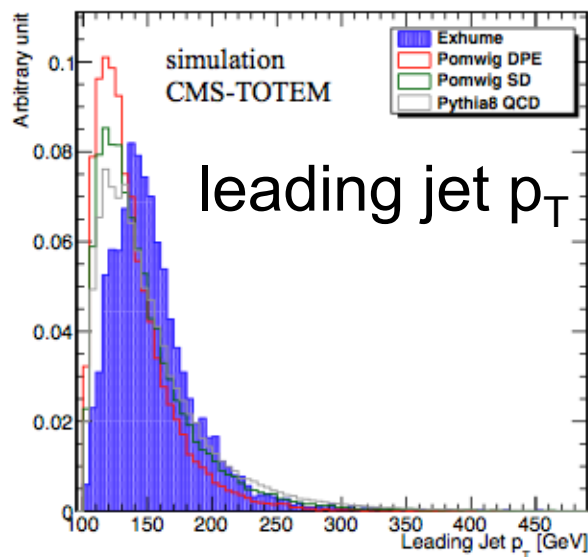


Kinematical distributions (cont.)

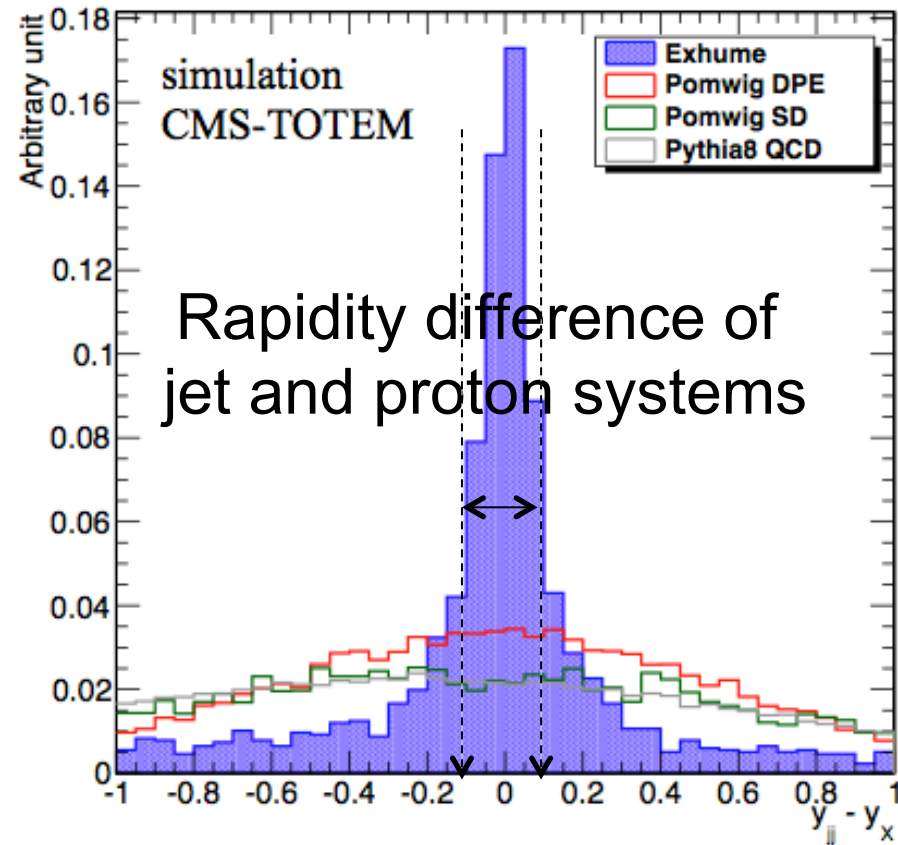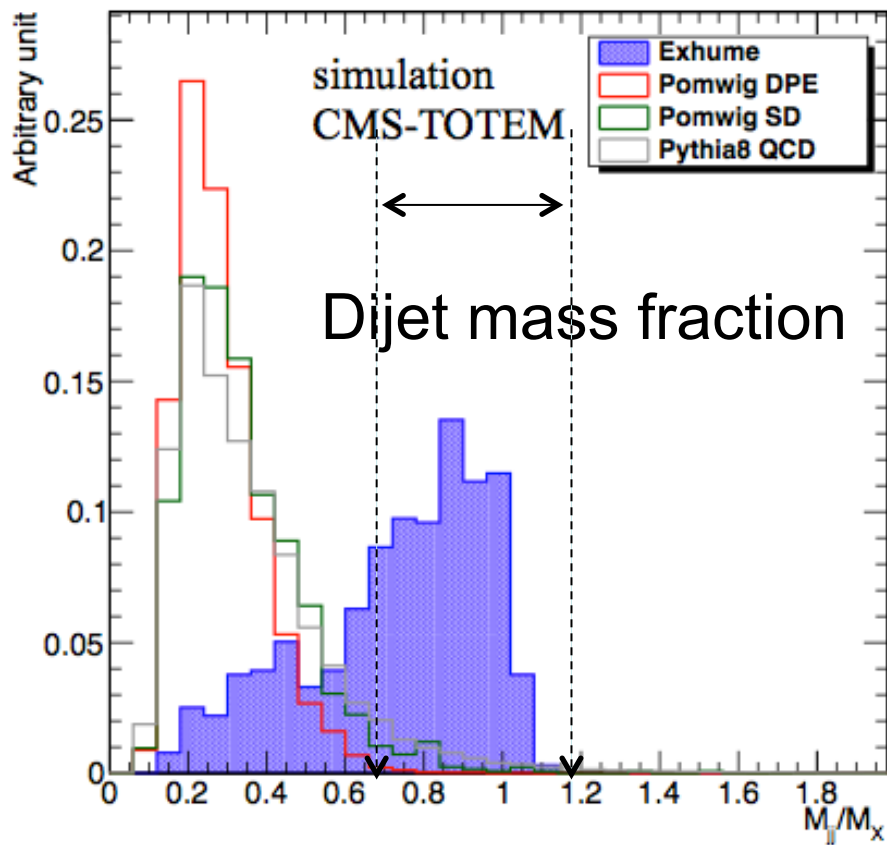

Track multiplicity

- Exploit the **exclusivity** of signal events to discriminate against large QCD multijet background
- Count number of tracks in **regions** of η/ϕ around the jet system

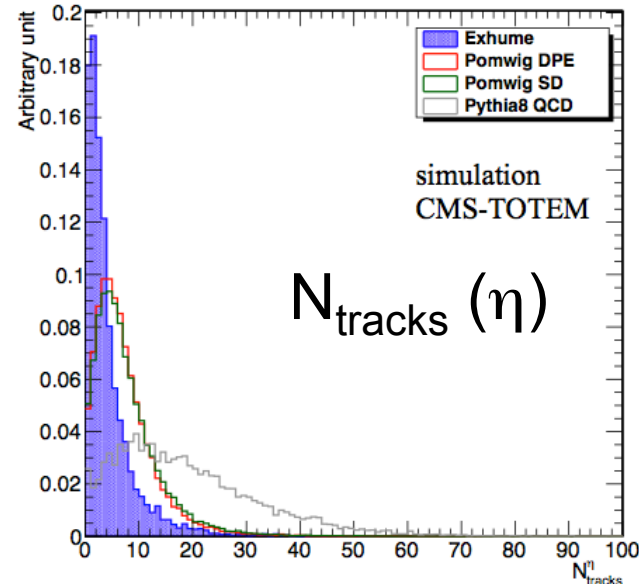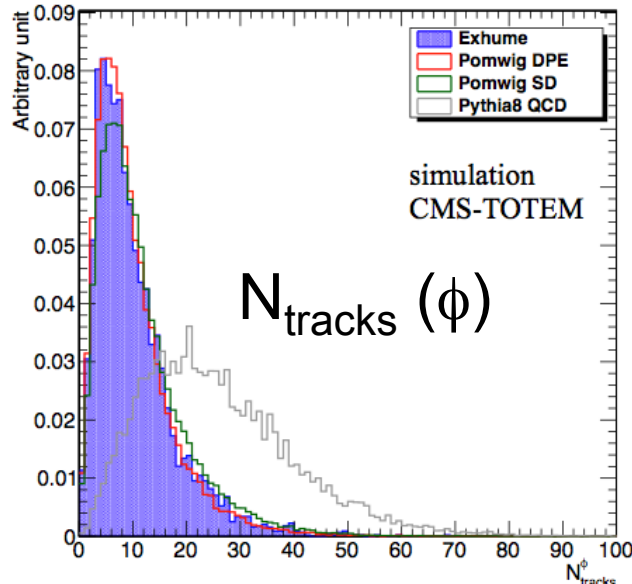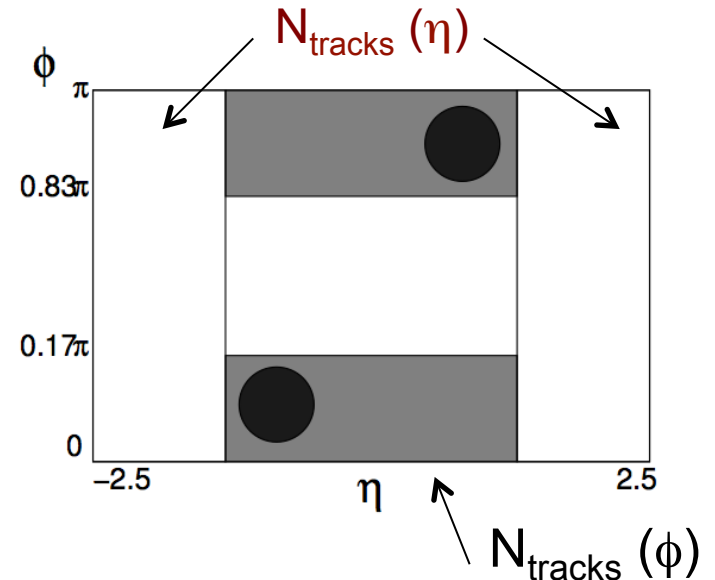

Yields per 1/fb – Pileup=50

Selection	Exclusive dijets		DPE		SD		Inclusive dijets	
	events	ϵ (%)	events	ϵ (%)	events	ϵ (%)	events	ϵ (%)
total number of events	652 ± 7	100	290×10^3	100	2.6×10^6	100	2.4×10^{10}	100
≥ 2 jets ($p_T > 100$ GeV, $ \eta < 2.0$)	287 ± 5	44	36×10^3	12.2	270×10^3	10	4.4×10^8	1.8
PPS tagging (fiducial)	77 ± 3	12	23×10^3	7.8	39×10^3	1.5	0.5×10^8	0.2
no overlap hits in ToF detectors	54 ± 2	8	18×10^3	6.3	25×10^3	1.2	0.3×10^8	0.12
ToF difference, Δt	$32 (27) \pm 2$	5	$14 (11) \times 10^3$	4.8	6×10^3	0.3	$95 (180) \times 10^4$	4×10^{-3}
$0.70 < [R_{jj} = (M_{jj}/M_X)] < 1.15$	$20 (16) \pm 1$	3.1	$43 (39) \pm 8$	0.01	$200 (250) \pm 40$	0.01	$45 (85) \times 10^3$	2×10^{-4}
$\Delta(y_{jj} - y_X) < 0.1$	$15 (12) \pm 1$	2.3	$10 (11) \pm 4$	-	12 ± 10	-	$5 (9) \times 10^3$	-
N_{tracks}	$5 (4) \pm 1$	0.8	$1.3 (1.5) \pm 0.5$	-	1 ± 1	-	$40 (77) \pm 1$	-
≥ 2 jets ($p_T > 150$ GeV, $ \eta < 2.0$)	$2.5 (1.9) \pm 0.2$	0.4	0.4 ± 0.2	-	0 ± 1	-	$20 (36) \pm 1$	-

$\Rightarrow S/B \sim 1/8$

Yields per 1/fb – Pileup=25

Selection	Exclusive dijets		DPE		SD		Inclusive dijets	
	events	ϵ (%)	events	ϵ (%)	events	ϵ (%)	events	ϵ (%)
total number of events	652 ± 5	100	290×10^3	100	2.6×10^6	100	2.4×10^{10}	100
≥ 2 jets ($p_T > 100$ GeV, $ \eta < 2.0$)	250 ± 4	38	25×10^3	8.7	190×10^3	7.6	3.4×10^8	1.4
PPS tagging (fiducial)	50 ± 2	8	15×10^3	5.1	12×10^3	0.5	0.1×10^8	0.05
no overlap hits in ToF detectors	43 ± 2	7	14×10^3	4.8	$10 (18) \times 10^3$	0.4	0.1×10^8	0.04
ToF difference, Δt	$30 (23) \pm 2$	4.6	$11 (9) \times 10^3$	3.8	3×10^3	0.1	$0.3 (0.6) \times 10^6$	1×10^{-3}
$0.70 < [R_{jj} = (M_{jj}/M_X)] < 1.15$	$20 (15) \pm 1$	3.1	$15 (14) \pm 3$	0.01	$85 (110) \pm 15$	-	$16 (30) \times 10^3$	1×10^{-4}
$\Delta(y_{jj} - y_X) < 0.1$	$15 (12) \pm 1$	2.4	$6 (4) \pm 2$	-	$3 (11) \pm 3$	-	$1.8 (3.4) \times 10^3$	-
N_{tracks}	$7.4 (5.8) \pm 0.4$	1.1	$0.8 (0.6) \pm 0.3$	-	1 ± 1	-	$19 (35) \pm 1$	-
≥ 2 jets ($p_T > 150$ GeV, $ \eta < 2.0$)	$3.5 (2.6) \pm 0.2$	0.5	$0.2 (0.1) \pm 0.1$	-	1 ± 1	-	$9 (17) \pm 1$	-

$\Rightarrow S/B \sim 1/3$

WW production

- Study of process: $pp \rightarrow pWWp$

- Clean process: W in central detector and “nothing” else, intact protons can be detected far away from IP
- Exclusive production of W pairs via photon exchange: QED process, cross section well known

- Events:


- WW pair in central detector, leading protons in PPS
- Studied only $e\mu$ final state

- SM observation of WW events

- $\sigma_{WW} = 95.6 \text{ fb}$, $\sigma_{WW} (W > 1 \text{ TeV}) = 5.9 \text{ fb}$





- Anomalous coupling study

- AQGCs predicted in BSM theories
- Two points: $a_0^W/\Lambda^2 = 5 \times 10^{-6}$, $a_C^W/\Lambda^2 = 5 \times 10^{-6}$

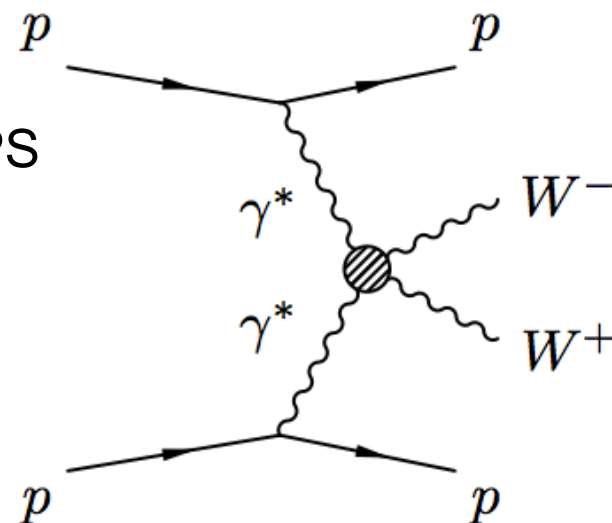





PPS timing vs. z-vertex

- Use timing to reject background
- Keep:
 - ~99% of signal events
 - ~10% of inclusive WW
- Two scenarios: 10ps and 30ps

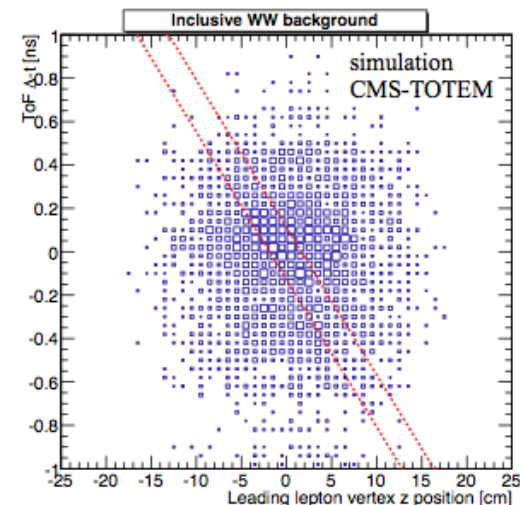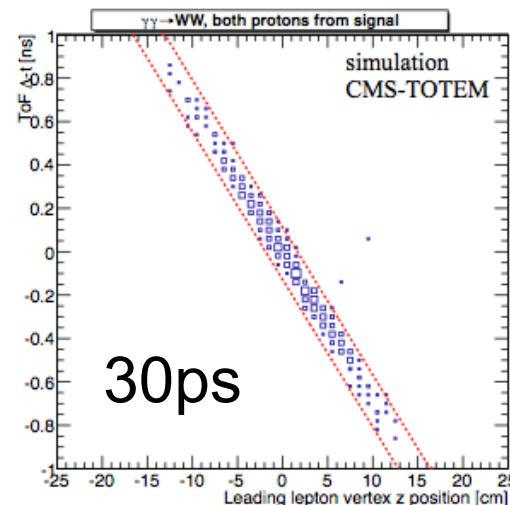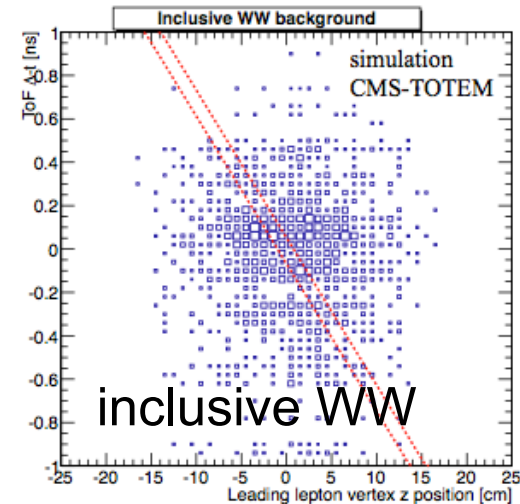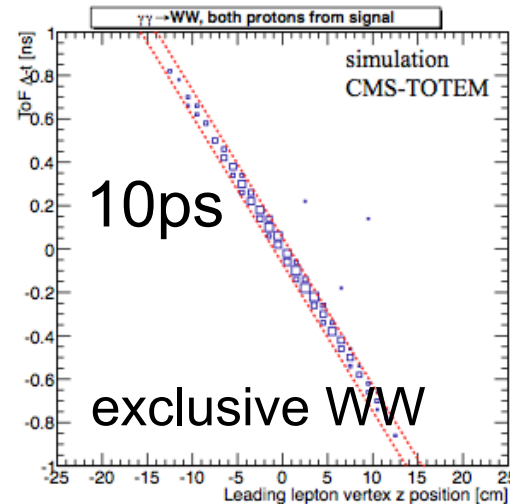


Kinematical distributions


- **SM vs AQGC:**
missing mass
provides good
separation
- Information from PPS

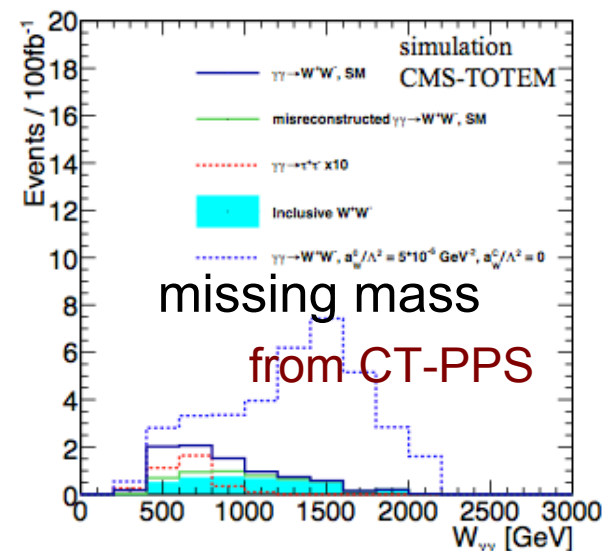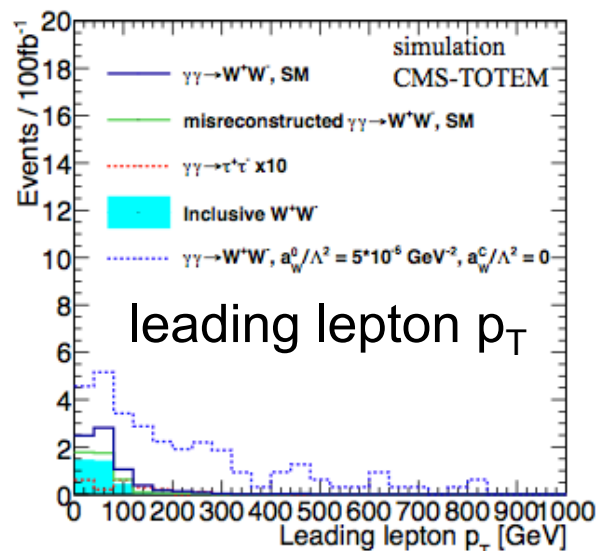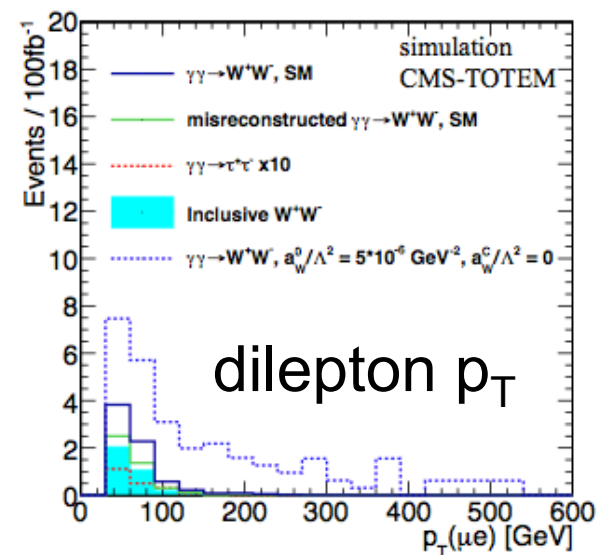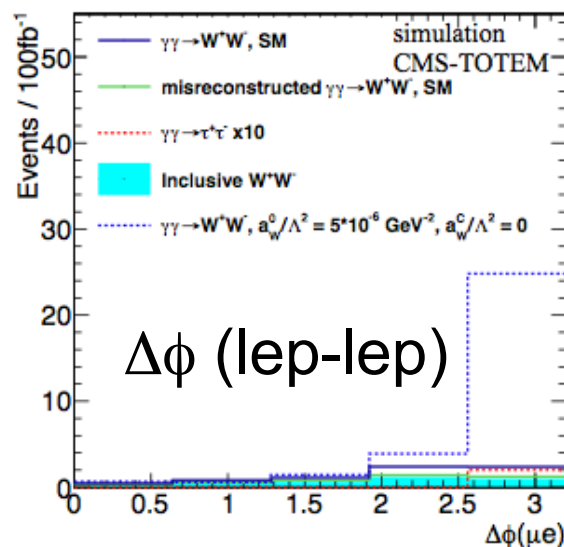

PPS and central detector

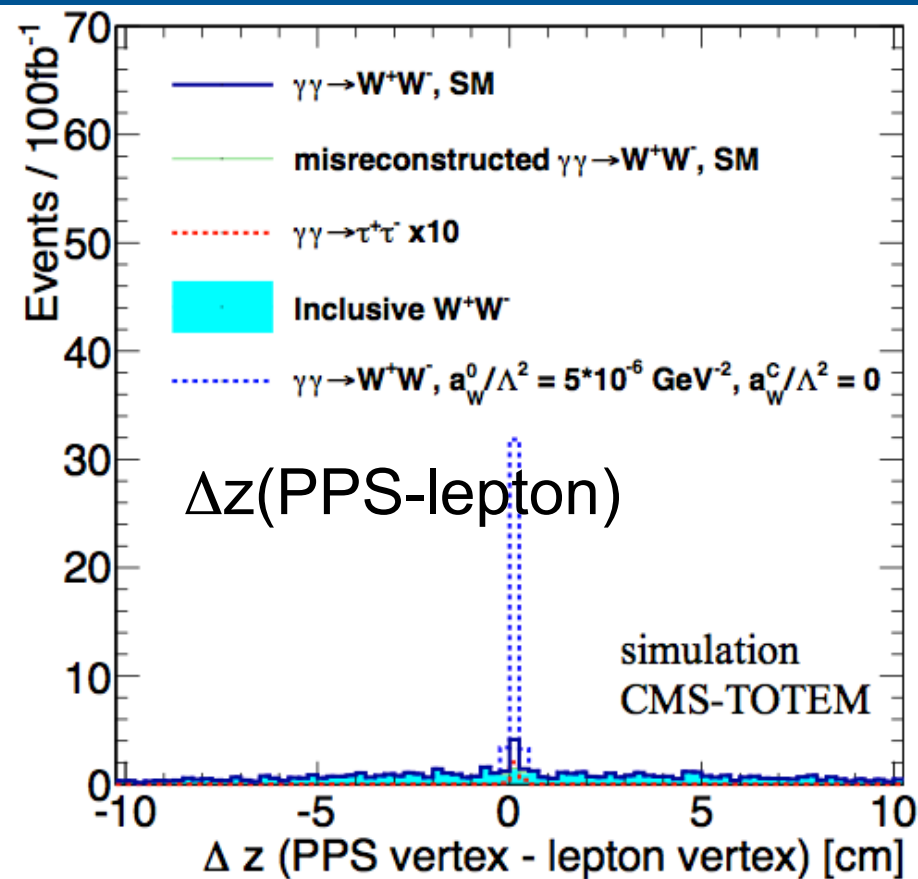

- Multiplicity of “extra tracks” associated to dilepton vertex
- Requiring <10 tracks keeps 80% of signal, 5% of bkg


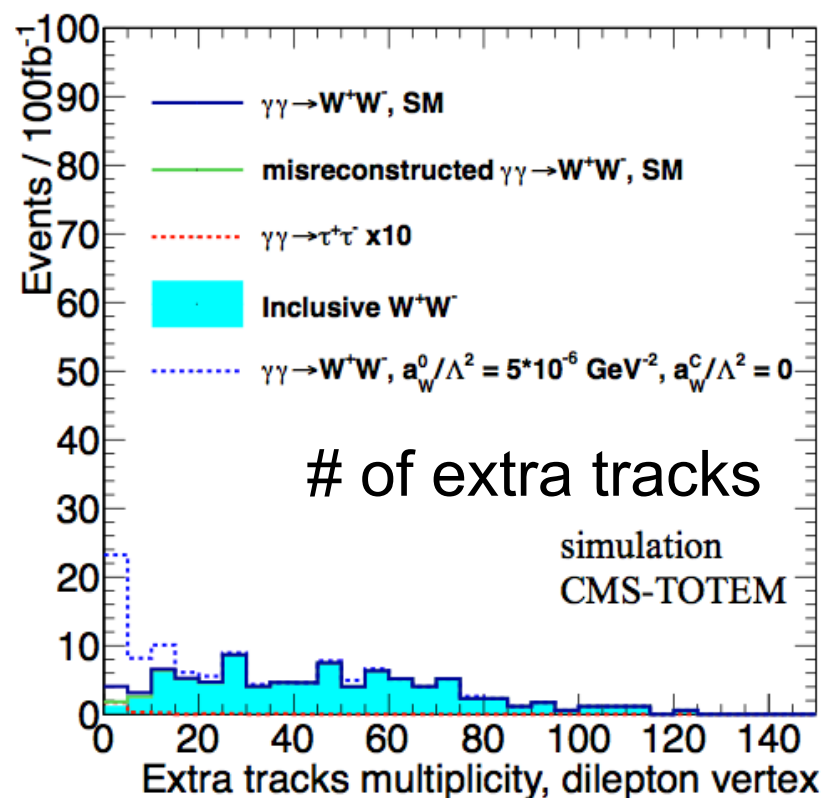


Yields (in fb)

- Select WW events
- Apply central lepton and PPS acceptance cuts
- Additional timing and track multiplicity cuts
- Inefficiency due to overlapping hits in timing detectors is taken into account
- Number in parenthesis are for time resolution of 30ps

Selection	Cross section (fb)			
	exclusive WW	exclusive WW (incorrectly reconstructed)	inclusive WW	exclusive $\tau\tau$
generated $\sigma \times \mathcal{B}(WW \rightarrow e\mu \nu\bar{\nu})$	0.86 ± 0.01	N/A	2537	1.78 ± 0.01
≥ 2 leptons ($p_T > 20$ GeV, $\eta < 2.4$)	0.47 ± 0.01	N/A	1140 ± 3	0.087 ± 0.003
opposite sign leptons, “tight” ID	0.33 ± 0.01	N/A	776 ± 2	0.060 ± 0.002
dilepton pair $p_T > 30$ GeV	0.25 ± 0.01	N/A	534 ± 2	0.018 ± 0.001
protons in both PPS arms (ToF and TRK)	$0.055 (0.054) \pm 0.002$	$0.044 (0.085) \pm 0.003$	$11 (22) \pm 0.3$	0.004 ± 0.001
no overlapping hits in ToF + vertex matching	$0.033 (0.030) \pm 0.002$	$0.022 (0.043) \pm 0.002$	$8 (16) \pm 0.2$	$0.003 (0.002) \pm 0.001$
ToF difference, $\Delta t = (t_1 - t_2)$	$0.033 (0.029) \pm 0.002$	$0.011 (0.024) \pm 0.001$	$0.9 (3.3) \pm 0.1$	$0.003 (0.002) \pm 0.001$
$N_{\text{tracks}} < 10$	$0.028 (0.025) \pm 0.002$	$0.009 (0.020) \pm 0.001$	$0.03 (0.14) \pm 0.01$	0.002 ± 0.001

Yields vs distance to beam

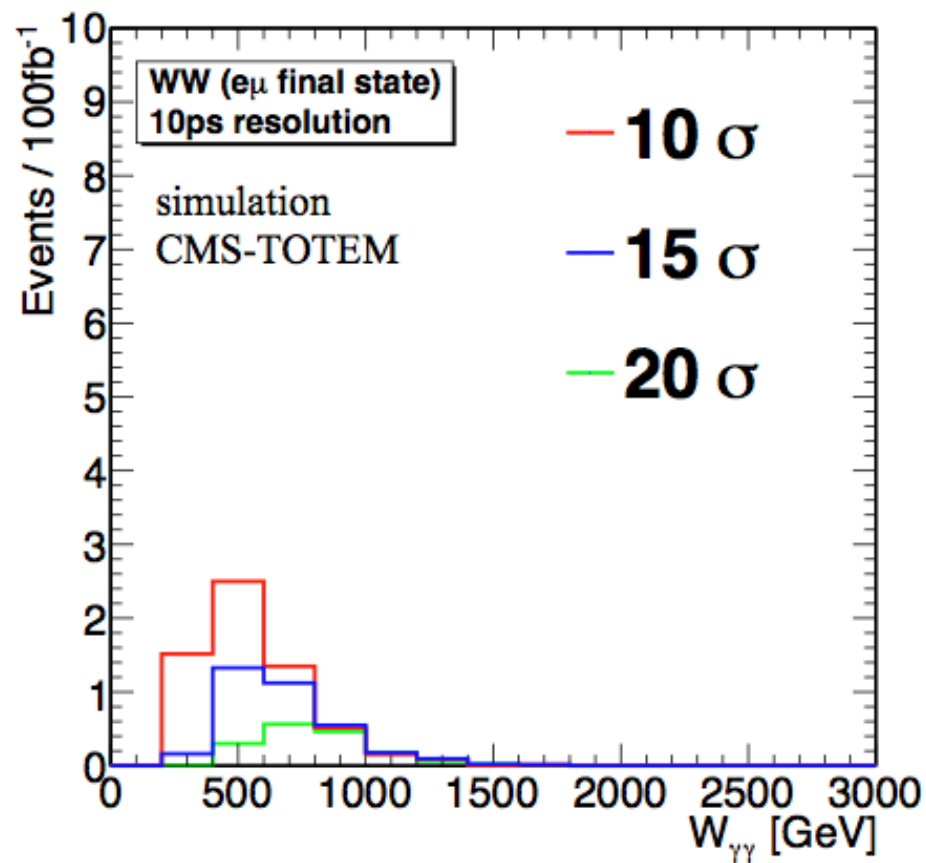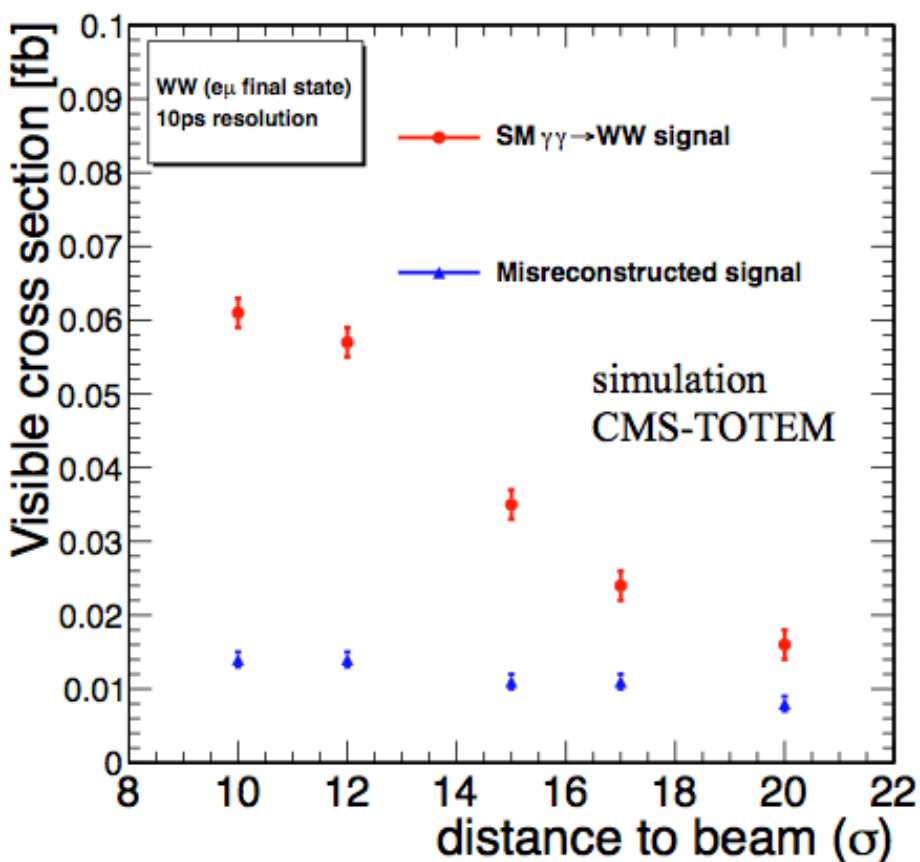

Potential enhancement of sensitivity with closer approach:

- Signal yield grows by $\sim x2$ when going from 15 σ to 10 σ
- Background is more or less flat

AQGC yields (in fb)



Table 7: Cross section (in fb) for the expected exclusive WW events due to anomalous quartic gauge couplings, for different values of anomalous coupling parameters (a_0^W and a_C^W) after each selection cut (for a timing resolution of 10 ps). In case of different values, numbers in parentheses are for a timing resolution of 30 ns. Only the $e\mu$ final state is considered. Statistical uncertainties are shown.

Selection	Cross section (fb)	
	$a_0^W / \Lambda^2 = 5 \cdot 10^{-6} \text{GeV}^{-2}$ ($a_C^W = 0$)	$a_C^W / \Lambda^2 = 5 \times 10^{-6} \text{GeV}^{-2}$ ($a_0^W = 0$)
generated $\sigma \times \mathcal{B}(WW \rightarrow e\mu \nu\bar{\nu})$	3.10 ± 0.14	1.53 ± 0.07
≥ 2 leptons ($p_T > 20 \text{ GeV}$, $\eta < 2.4$)	2.33 ± 0.08	1.00 ± 0.04
opposite sign leptons, “tight” ID	1.82 ± 0.08	0.78 ± 0.03
dilepton pair $p_T > 30 \text{ GeV}$	1.69 ± 0.07	0.68 ± 0.03
protons in both PPS arms (ToF and TRK)	$0.52 (0.50) \pm 0.04$	$0.18 (0.17) \pm 0.02$
no overlapping hits in ToF detectors	$0.35 (0.32) \pm 0.03$	$0.12 (0.11) \pm 0.01$
ToF difference, $\Delta t = (t_1 - t_2)$	$0.35 (0.32) \pm 0.03$	$0.12 (0.11) \pm 0.01$
$N_{\text{tracks}} < 10$	$0.27 (0.24) \pm 0.03$	$0.11 (0.10) \pm 0.01$

AQGC expected limits



Expected limits @95%CL:

$$\begin{aligned} a_0^W / \Lambda^2 &= 2 \times 10^{-6} \quad (3 \times 10^{-6}) \\ a_C^W / \Lambda^2 &= 7 \times 10^{-6} \quad (10 \times 10^{-6}) \end{aligned}$$

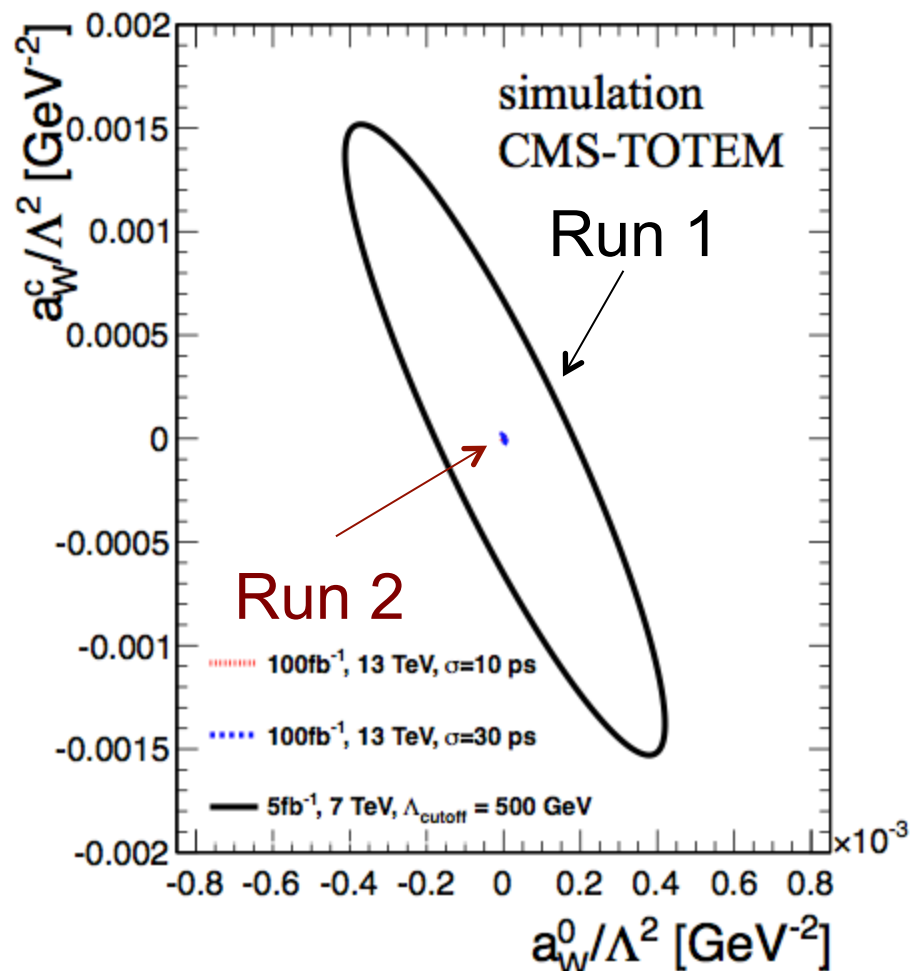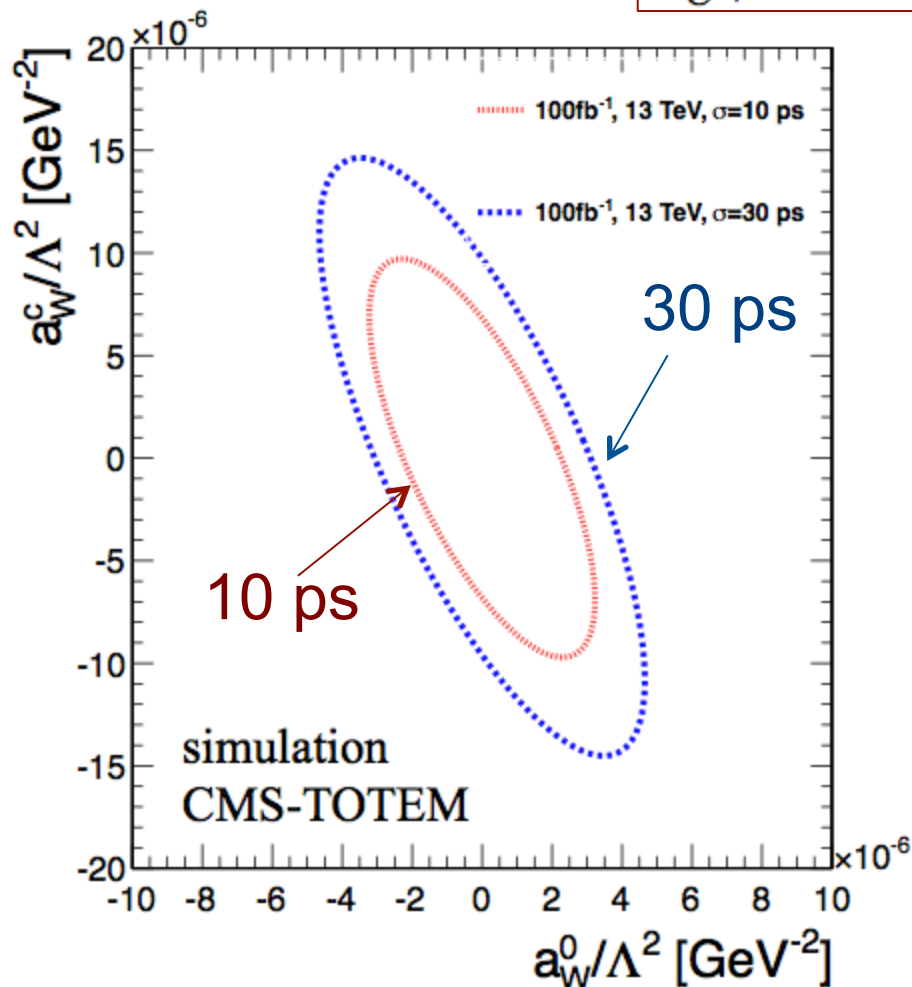


Beam pockets

- Approaching the beam:
 - Roman Pots (RPs)
 - Movable Beam Pipe (MBP)
- RP is more mature solution
 - To be tested in 2015 exploratory phase
- MBP pursued in parallel
 - Low impedance
 - Joint project of LHC/experiments

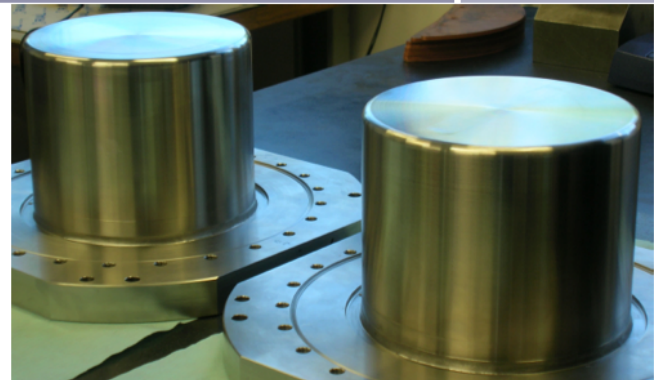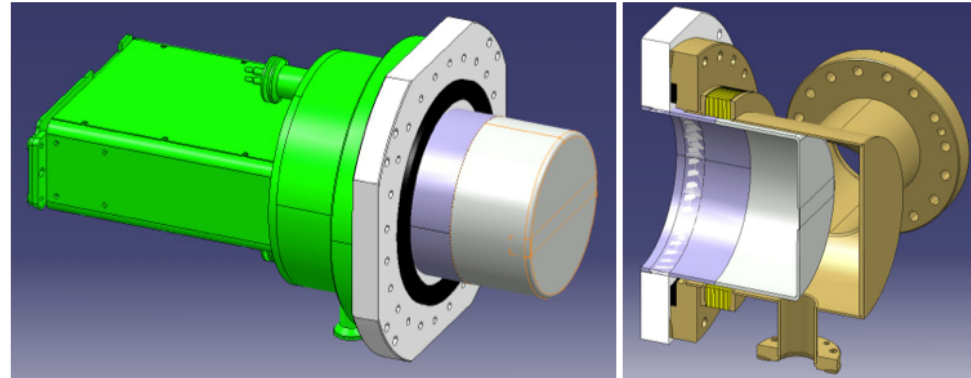

Roman Pot

- Tests of TOTEM RPs at high luminosity revealed issues (vacuum, beam dumps, heating)
- Improvements carried out
 - New RF shielding in standard box-shaped RPs
 - New cylindrical RP for timing detectors
 - 10 μm thick copper coating
 - New ferrites

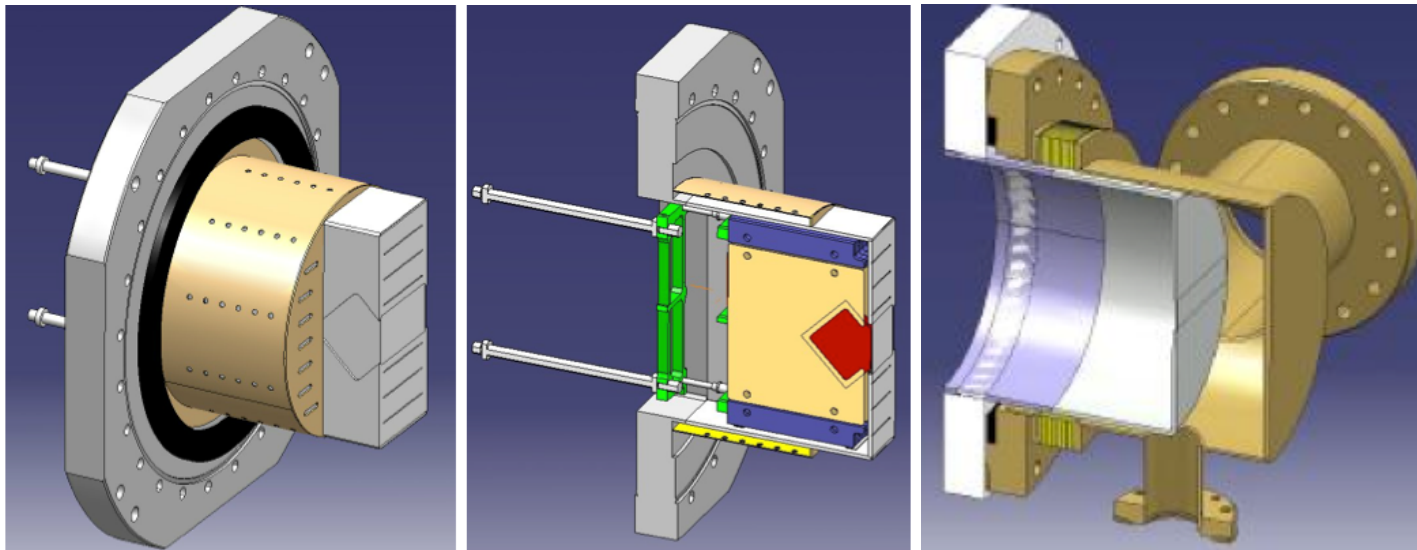

RP studies

- Impedance simulation
- RF tests in the lab
- GEANT simulation of shower production
- FLUKA simulation of fluence at Q6



	Distance from the beam [mm]	$\frac{\Im Z_{\text{long}}^0}{n}$ [m Ω]	fraction of $(\frac{\Im Z_{\text{long}}}{n})_{\text{LHC}}^{\text{eff}}$ (90 m Ω)	$\overline{\Im Z_{\text{trans}}^{\text{driving}}}$ [M Ω /m]	fraction of $\Im(Z_{\text{x}})_{\text{LHC}}^{\text{eff}}$ (25 M Ω /m)	Heating [W] I=0.6 A
Box RP	1	1.7	< 1.9 %	0.15	< 0.6 %	62
	5	1.3	< 1.4 %			52
	40 (garage)	0.41	< 0.45 %			10
Cylindrical RP	1	1.1	< 1.2 %	0.11	< 0.5 %	13
	5	0.73	< 0.81 %			11
	40 (garage)	0.18	< 0.20 %			4
Shielded RP	1	1.2	< 1.3 %	0.2	< 0.8 %	10
	40 (garage)	0.30	< 0.33 %			2

RPs installed




Movable Beam Pipe



- Main body of MBP in stainless steel
- Copper coated for RF shielding and Non-Evaporative Getter (NEG) coated
- Interior surface tapered into a conical shape to reduce RF impedance effects
- At 1mm, RF impedance estimated at 0.05% (trans) and 0.5% (long)
- Thin-window (0.3mm) in AlBeMet alloy (38% aluminum, 62% beryllium) to minimize multiple scattering

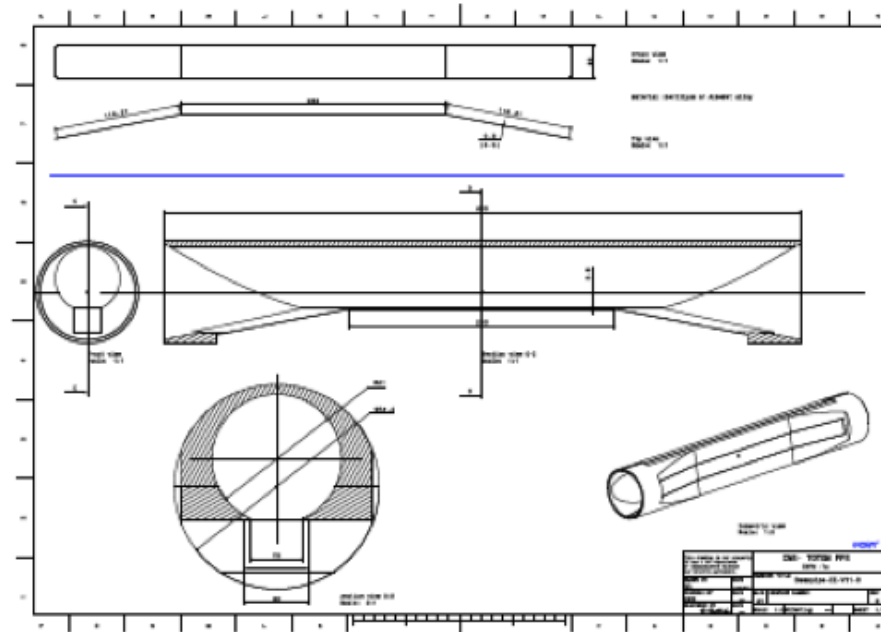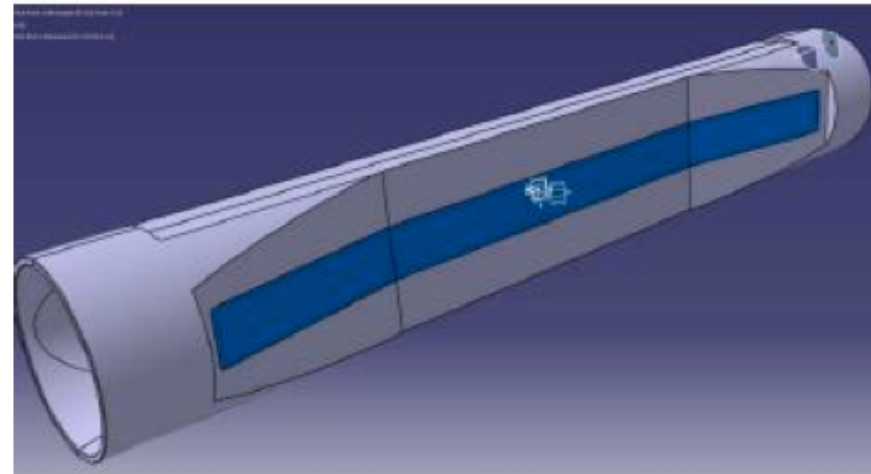

Tracking detectors


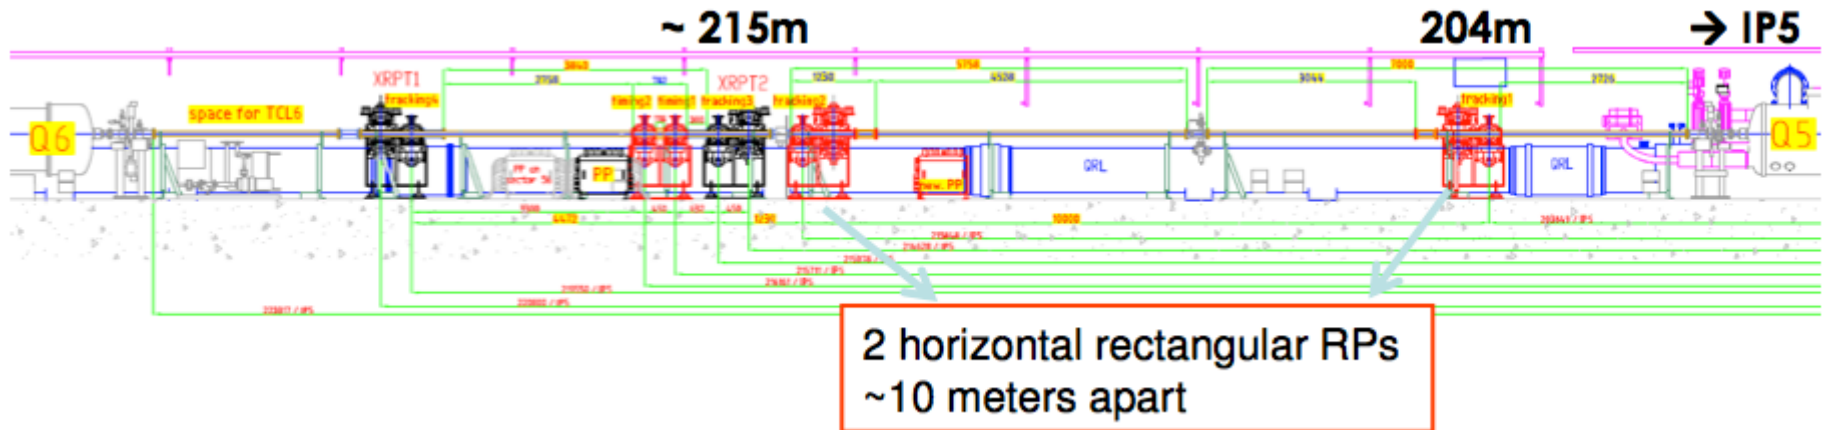


- Position and angle, combined with beam magnets, allow to determine momentum of scattered proton
 - Position resolution: $\sim 10 \mu\text{m}$
 - Angular resolution: $\sim 1\text{-}2 \mu\text{rad}$
- Slim edges on side facing beam
 - Dead region: $\sim 100 \mu\text{m}$
- Tolerance to inhomogeneous irradiation
 - $2 \times 10^{15} \text{ n}_{\text{eq}}/\text{cm}^2$ close to beam (for 100/fb)
- Baseline: 3D silicon pixel detectors

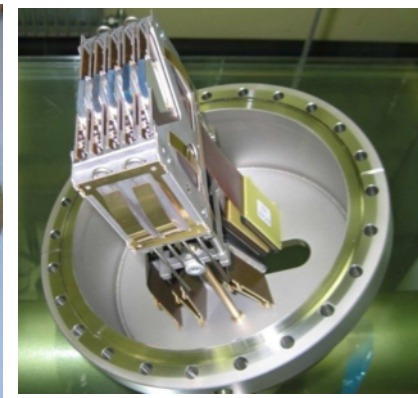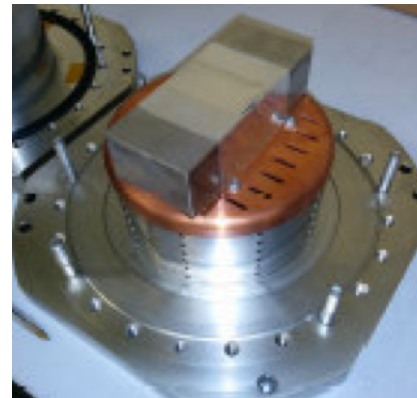

Tracking detectors (cont.)


- 3D silicon sensors (manufactured by FBK/CNM)
- PSI46dig ROC, with same readout as Phase I CMS upgrade pixel system
 - Existing CMS DAQ components and software can be reused
- 6 detector planes per station
 - Detectors are tilted
 - Number of planes provide redundancy

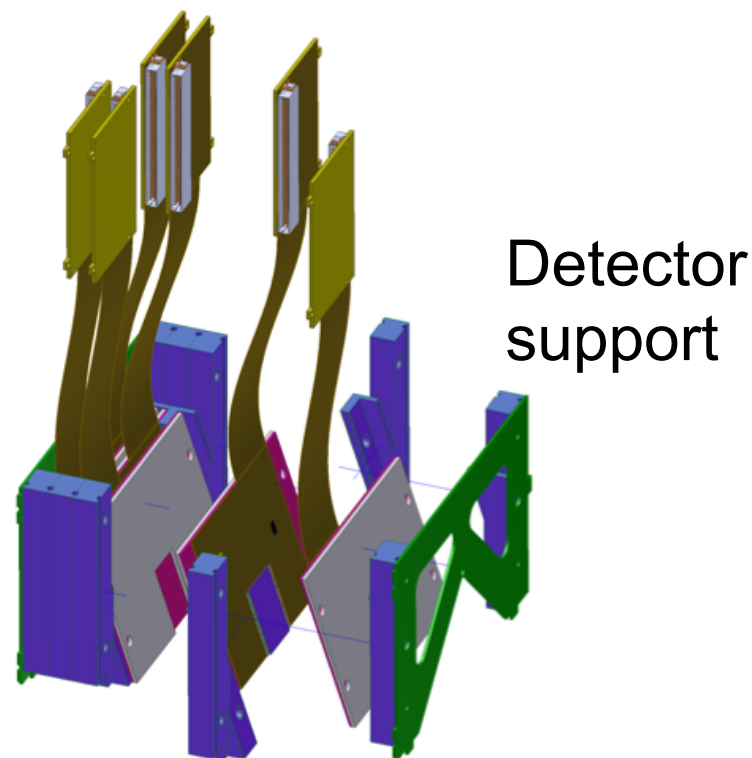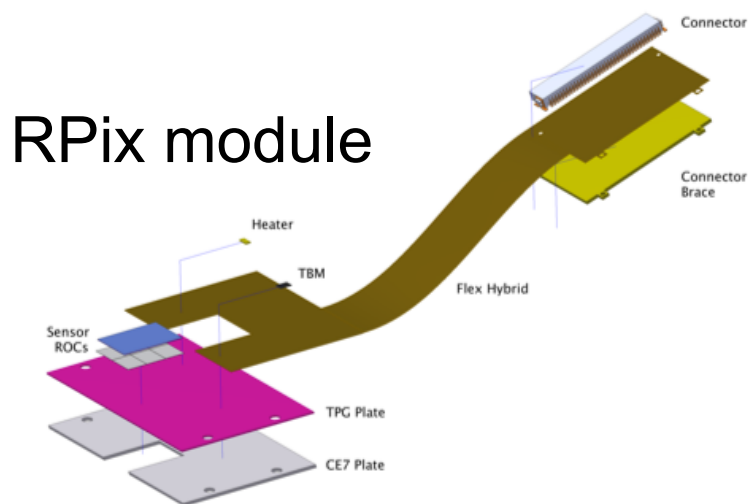

Tracking detectors (cont.)

6 detector planes per station


For each plane:

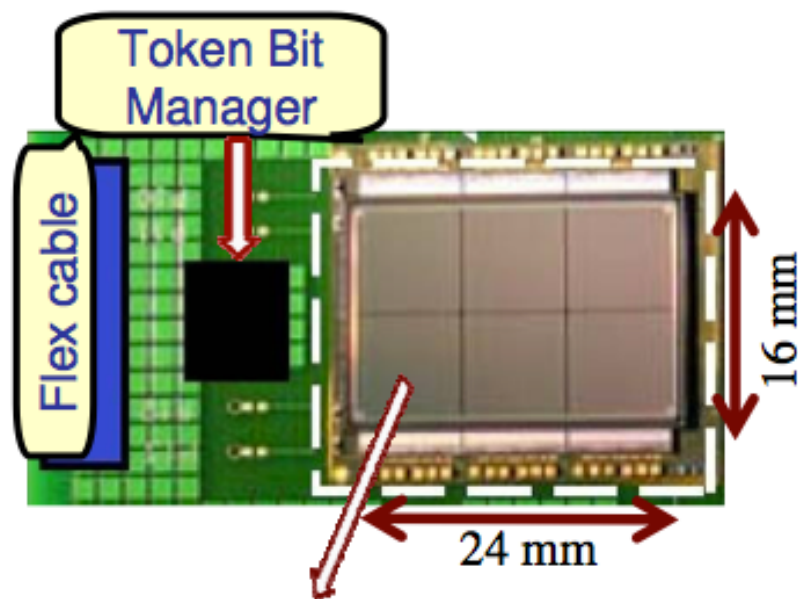

- 16x24 mm² 3D silicon pixel sensors
- 150(x) x 100(y) μm² pixel pattern (same as CMS pixel detectors)
- 6 PSI46dig ROC (52x80 pixels each)

- 3D sensors consist of array of columnar electrodes

– Mature technology (ATLAS IBL)

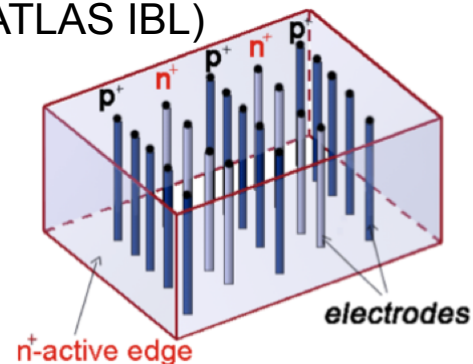


Features wrt to planar sensors:

- Low depletion voltage (~10V)
- Fast charge collection time
- High radiation hardness
- Slim edges (dead area of ~100-200 μm); active edges with dead area reduced to few μm
- Spatial resolution comparable to planar detectors

Beam tests: preliminary results


- FBK 3D sensors with 200 μm slim edges coupled to new PSI46dig ROC tested at Fermilab
- Measurements with irradiated detectors (from 1×10^{15} to 1×10^{16} $n_{\text{eq}}/\text{cm}^2$) ongoing, results promising

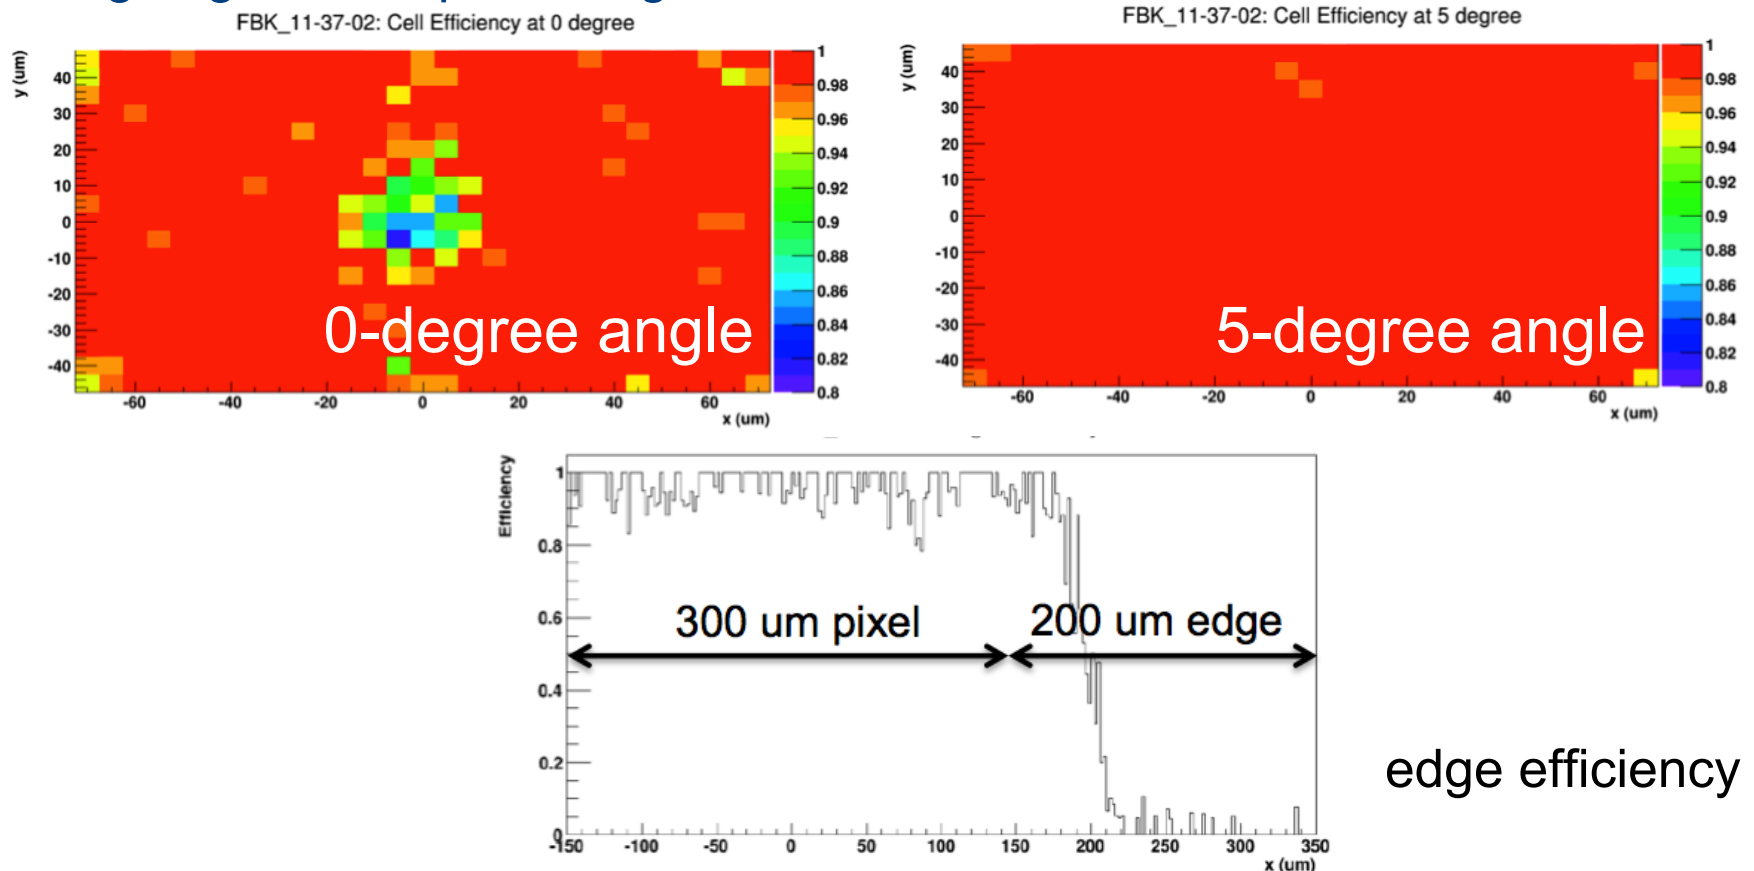


Preliminary results

Space Resolution for FBK_11-37-02 ($\theta = 0^\circ$)


X residuals - 1 pixel cluster

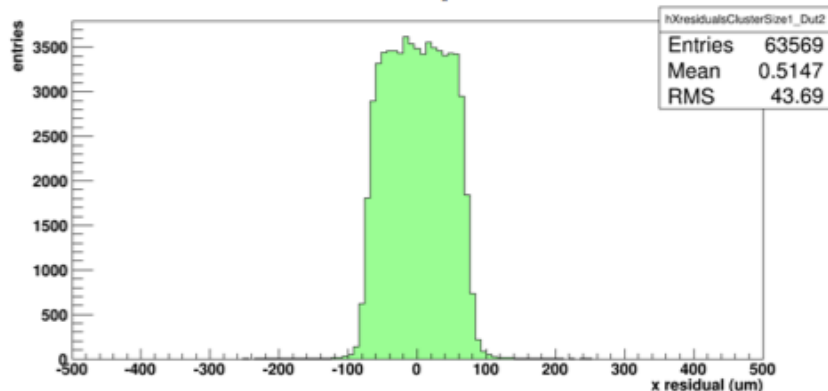


Y residuals - 1 pixel cluster

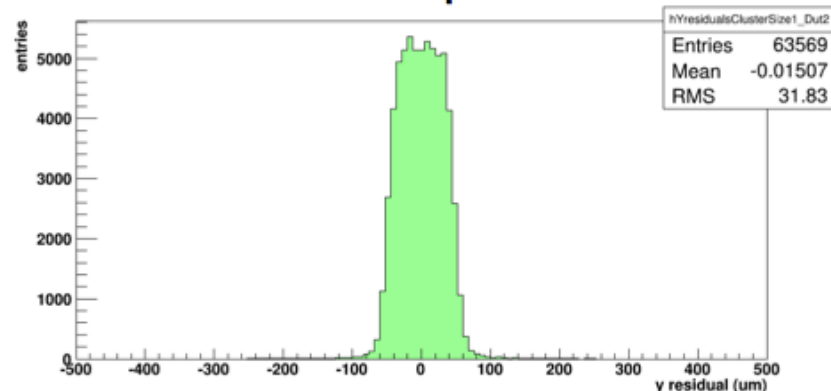

X residuals - 2 pixel cluster


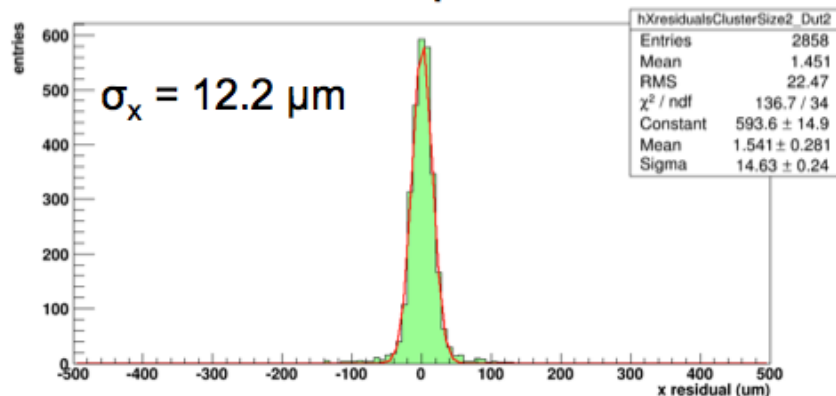


Y residuals - 2 pixel cluster

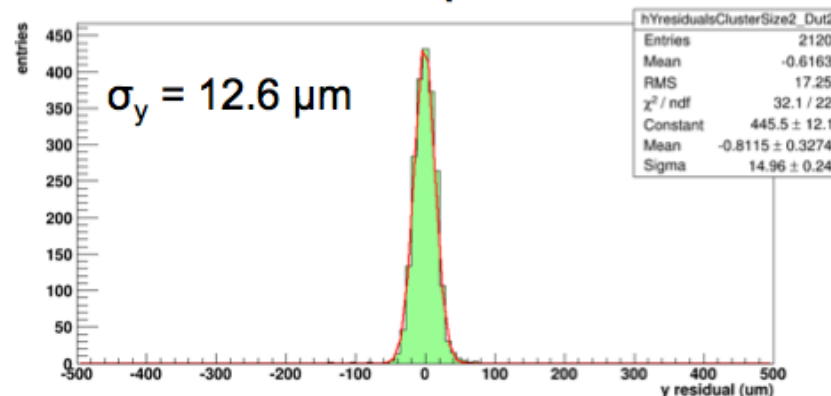

RP cooling system




- RP cooling system may handle up to 50W of heat released by on-detector electronics
- RPix estimate: <10W per package
- Use existing TOTEM cooling system

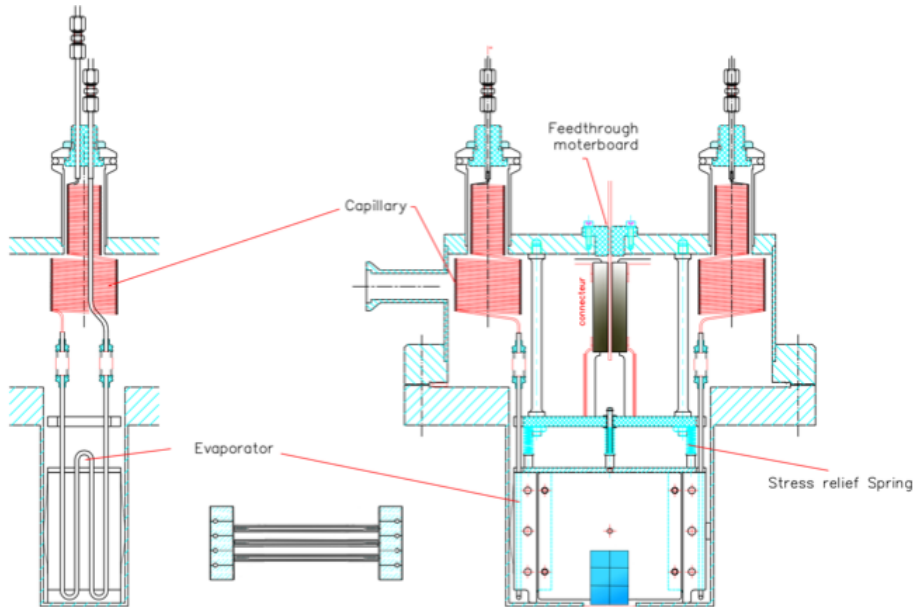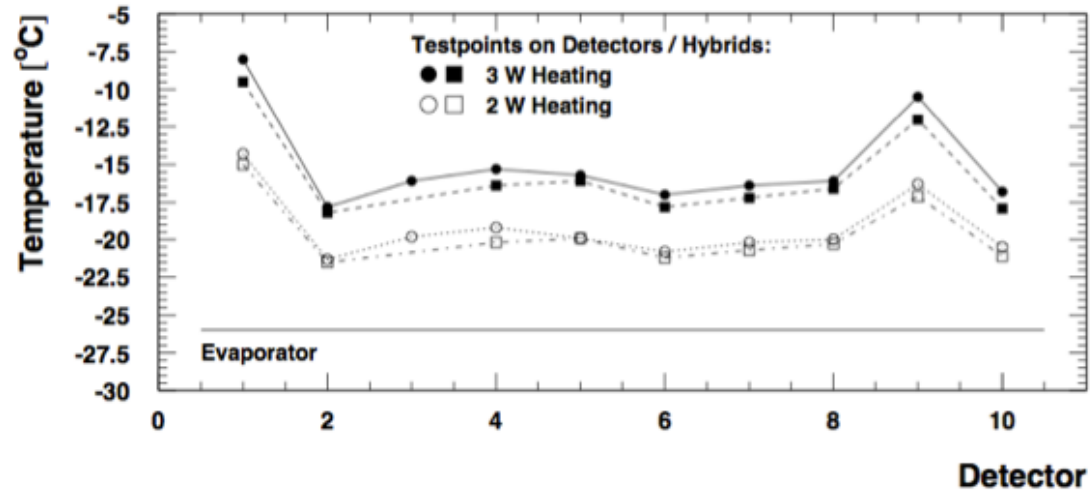

- Temperature measured on test-points on the detectors (circles) and on the hybrids (square) for a heating power of 2W and 3W (open and solid markers)

Timing detectors




- Proton timing measurement from both sides of CMS allows to determine the primary vertex, correlate it with the central detector's, reject pileup
 - Time resolution $10\text{ps} \rightarrow 2\text{mm}$
 - Reasonable segmentation
 - Radiation hard
 - Minimize impact on beam

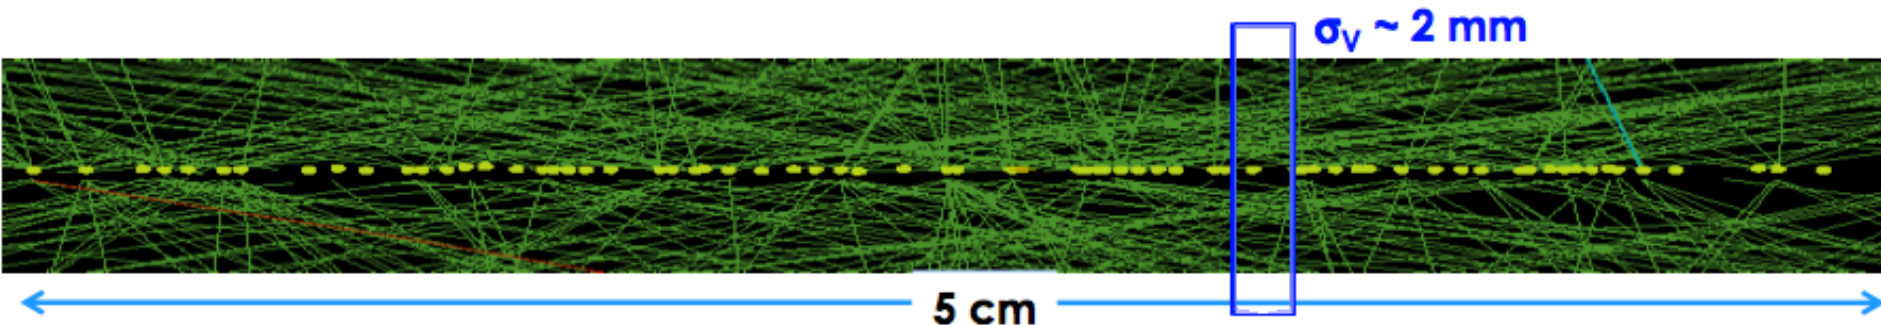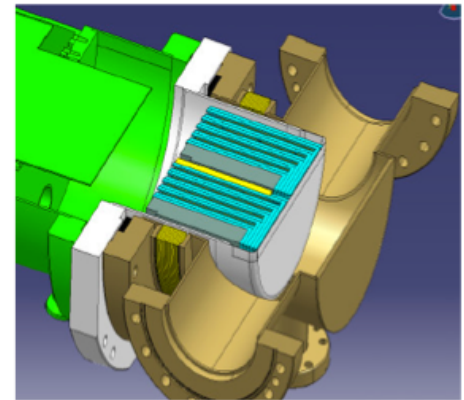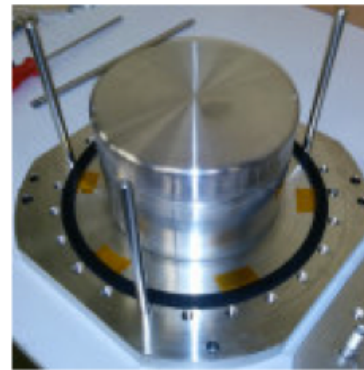

Timing detectors (cont.)


Baseline

- Cerenkov light in quartz radiator bars
- QUARTIC module:
 - 20 (4x5) 3x3 mm² L-shaped bar elements
 - 200 μ m wire grid separating bars
- Installation foreseen by end of 2015

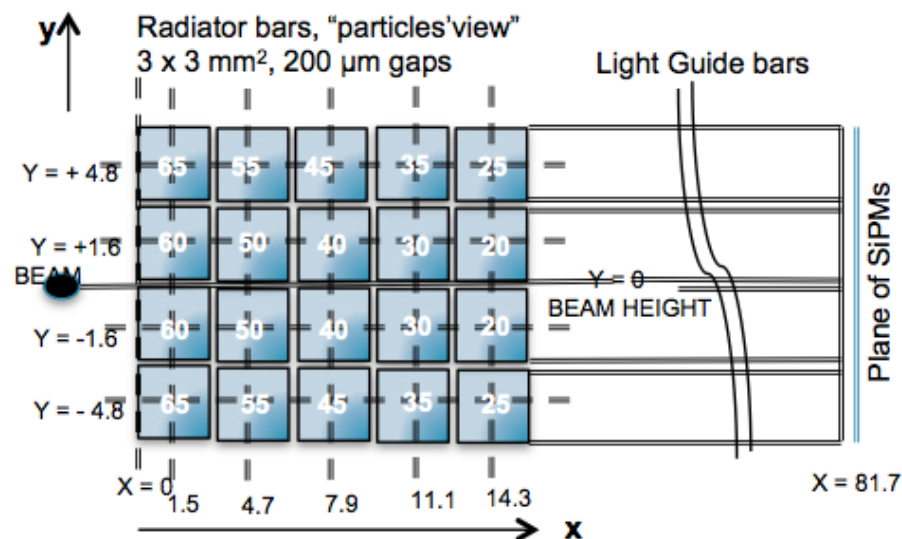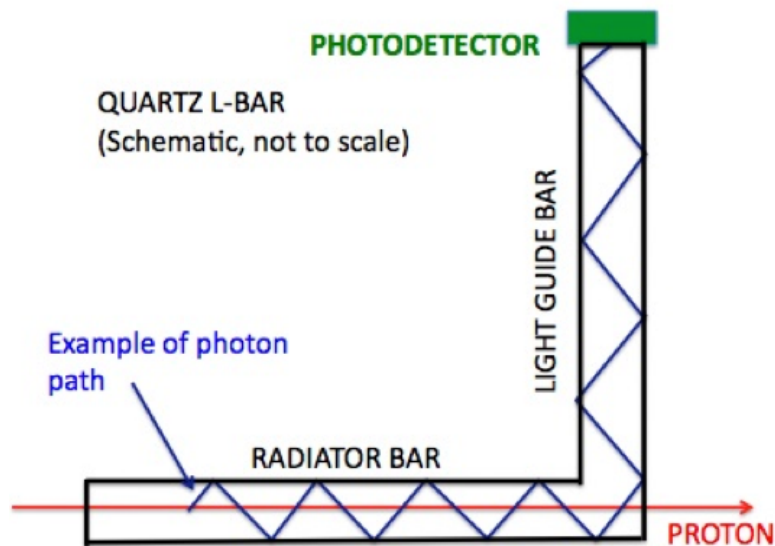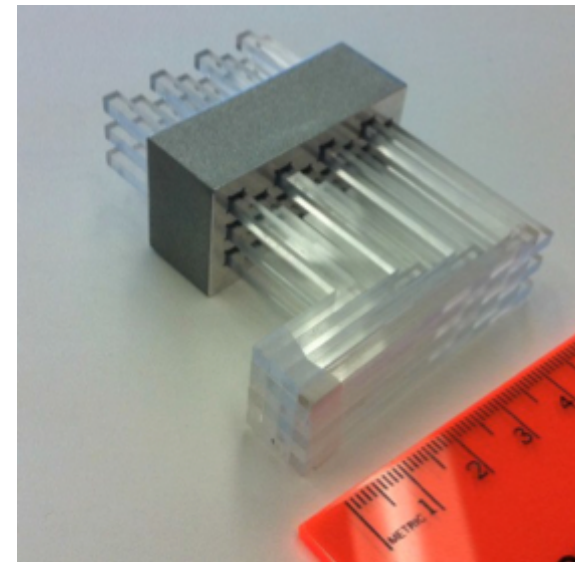


Photosensors

- SiPMs Hamamatsu MPPC S12572-050
 - Qualified for 10^{12} n/cm² (CMS HCAL)
 - Low afterpulse
 - Increased leakage current may impact time resolution
- Possible use of GInP photosensors (Shashlik Phase2 option)


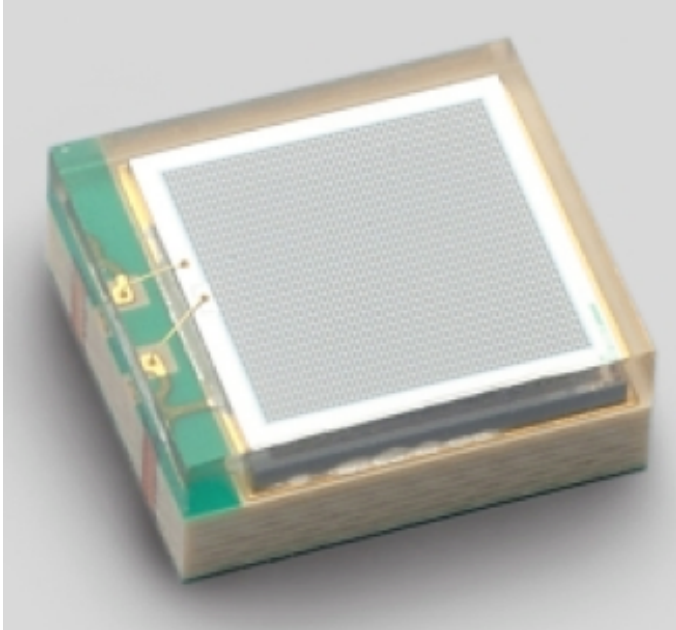


SiPM readout board

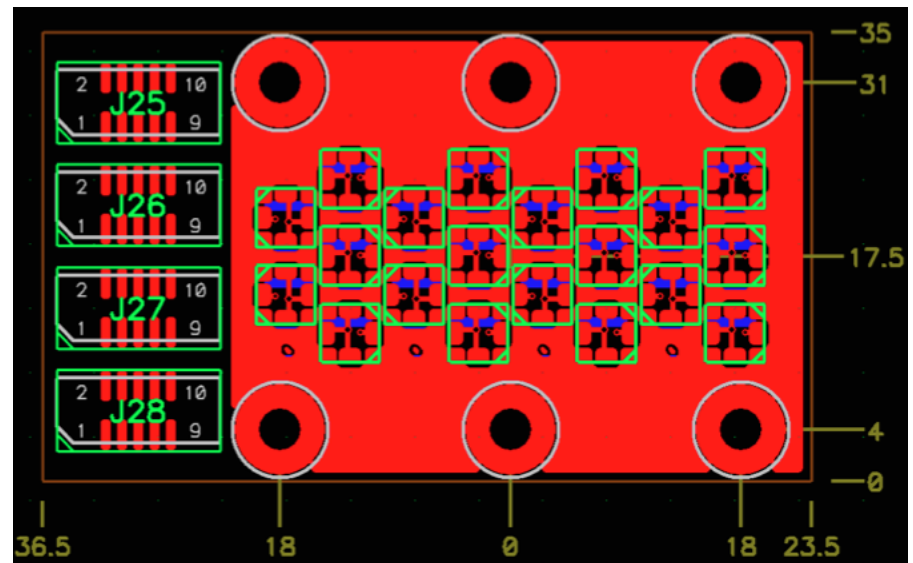


Beam tests

- Test modules with 30 and 40 mm radiator bars
- Time resolution $\sigma=36$ ps (30 mm bar)
 - Time difference between L-bar and reference signal
 - 2-in-line $\Rightarrow$ 25ps (improvements possible)

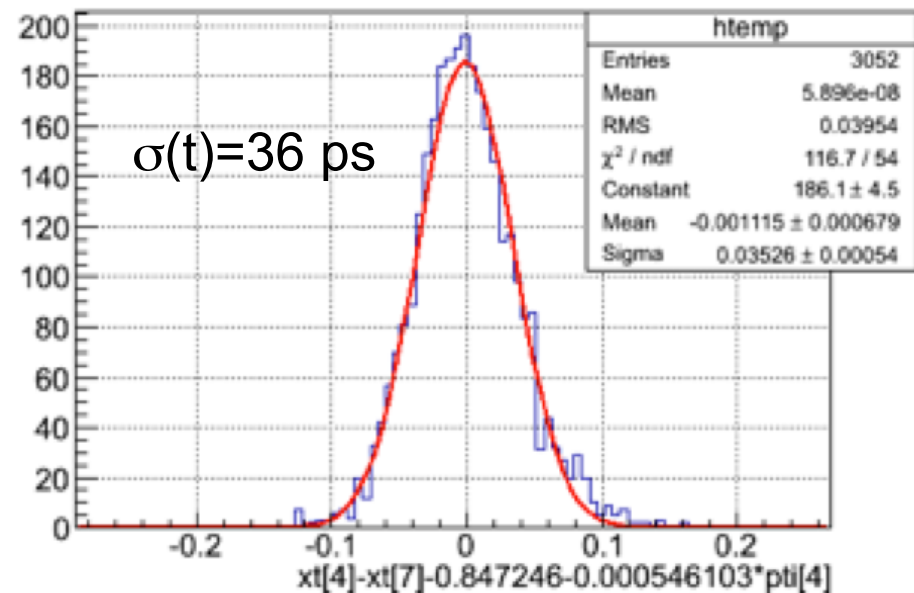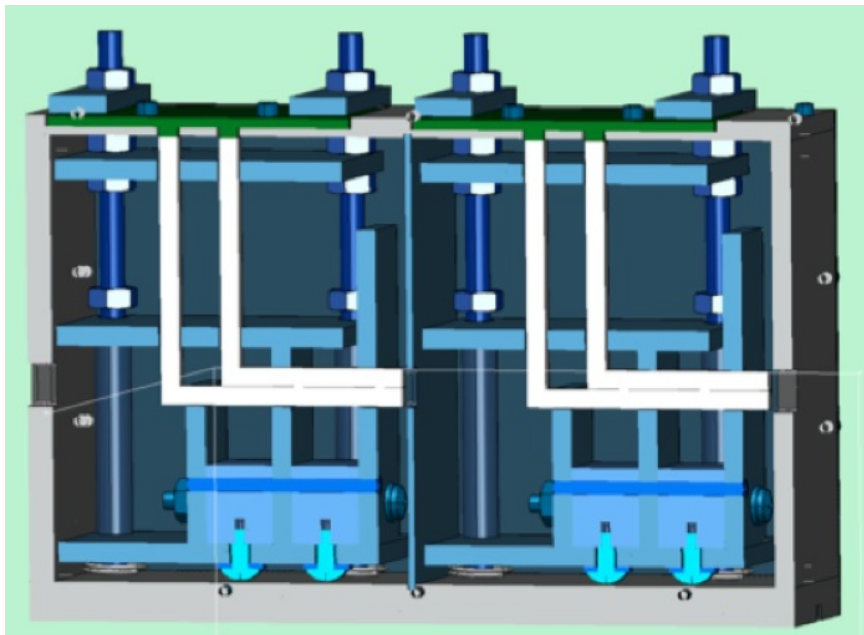


Gas Cherenkov option

- GasToF: gas Cherenkov detector with direct detection of very forward light cone
 - Tests with single-anode MCP-PMTs showed time resolution of ~ 15 ps for single-photoelectron signals
- GasToF design uses Photonis 8x8 anode MCP-PMTs
 - 12 cm long filled with the C_4F_{10} at 2 atm produce signal of 7 pe's per proton
 - MCP has transit time spread of 35 ps
 - Expected time resolution per proton of 15 ps

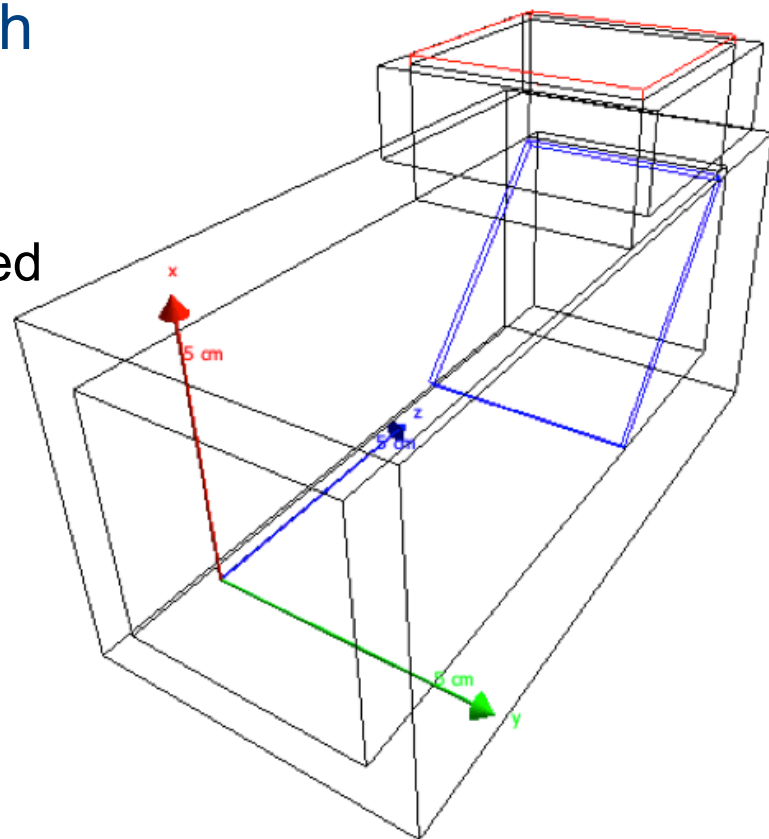

GasToF simulation


- GEANT study: capability to distinguish two or more protons in the detector
- MCP channel occupancy is expected at 10% for physical protons (after optimization)

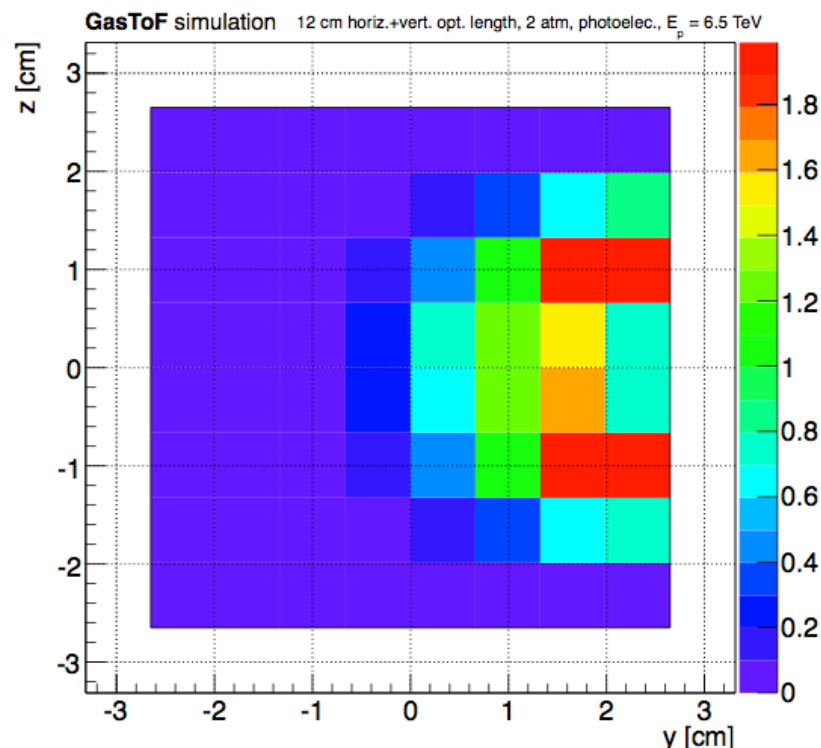

Average number of pe's (before collection efficiency) on the MCP PMT 64 ch for protons ($\mu=50$)

Readout system

- Amplifier & discriminator NINO and high resolution HPTDC chips
- Time resolution of readout is 20 ps
- Integrated with PPS DAQ (tracking+timing)
- Readout rate limit is 5 MHz/channel
 - Quartic 3x3mm² rate too high above PU=25

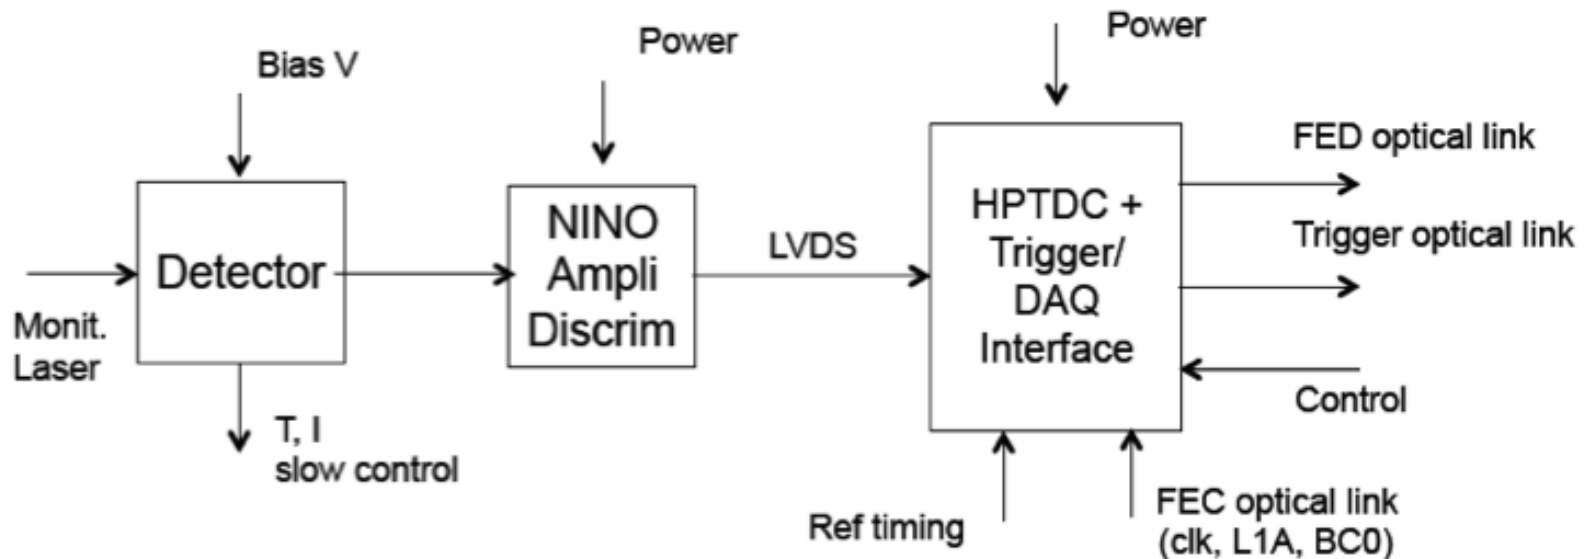

R&D on timing detectors

Solid state as future alternative


- Diamonds, silicon-based

Motivation

- Radiation-hardness
- Fast signals
- Finer segmentation reducing channel occupancy
- Thin and light, allow multiple layers N
 - reducing nuclear interaction
 - Time resolution $\sim 1/\sqrt{N}$



Diamond detectors

- Appropriate characteristics
 - Fast signals
 - Detector pixel size does not affect signal response
 - Adjustable geometry
- Requires R&D on frontend electronics
 - Small charge signal from diamond sensor (6k e) implies very low noise electronics
 - Good timing requires fast electronics
- Requires R&D on radiation and rate effects

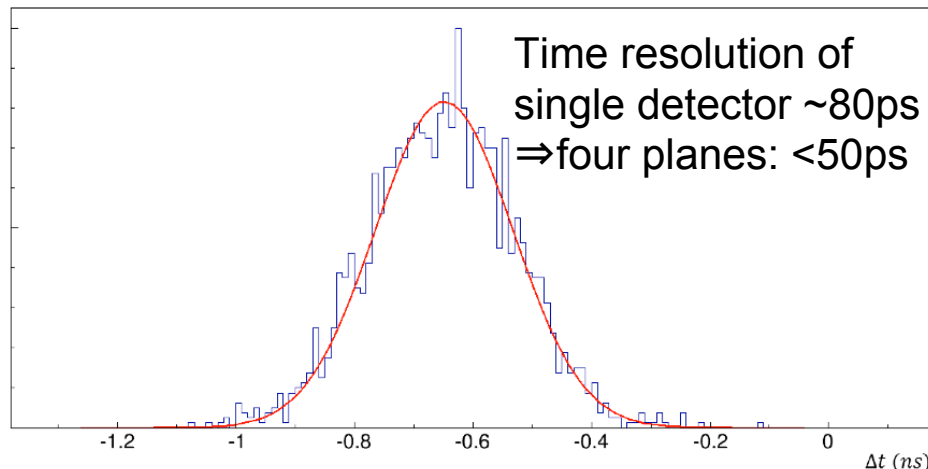



Timing silicon detectors

- Based on Low-Gain Avalanche Diodes (LGAD)
 - Output signals 10 times larger than traditional silicon sensors
- Requires R&D on frontend electronics
- Requires R&D to improve radiation resistance

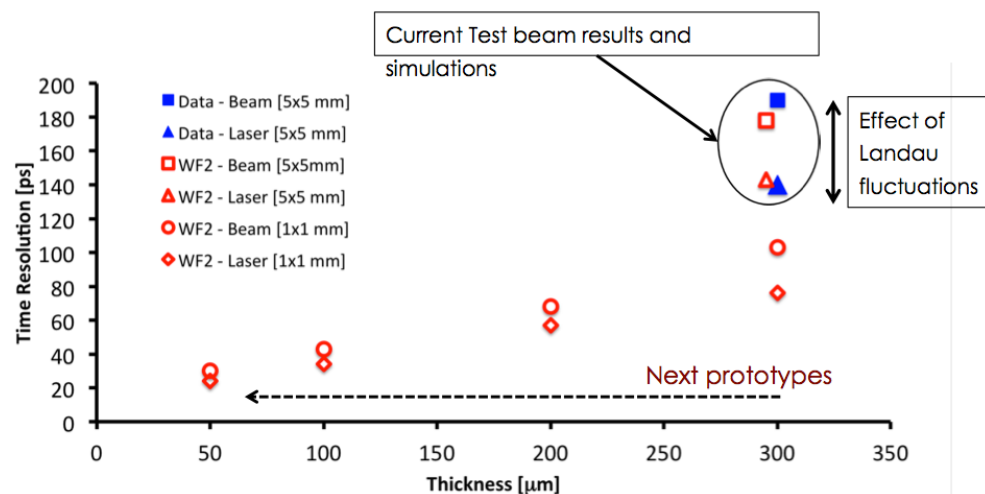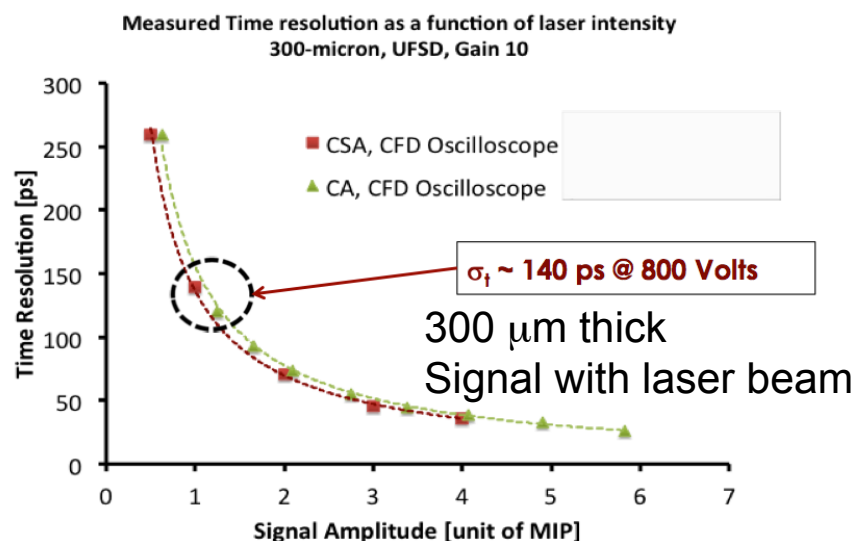


Avalanche Photo Diodes

- Avalanche Photo Diodes (APDs)
 - preliminary tests show good time resolution
- Requires R&D on frontend electronics
- Requires R&D to improve radiation resistance
 - tests ongoing
- Requires improved characterization/understanding

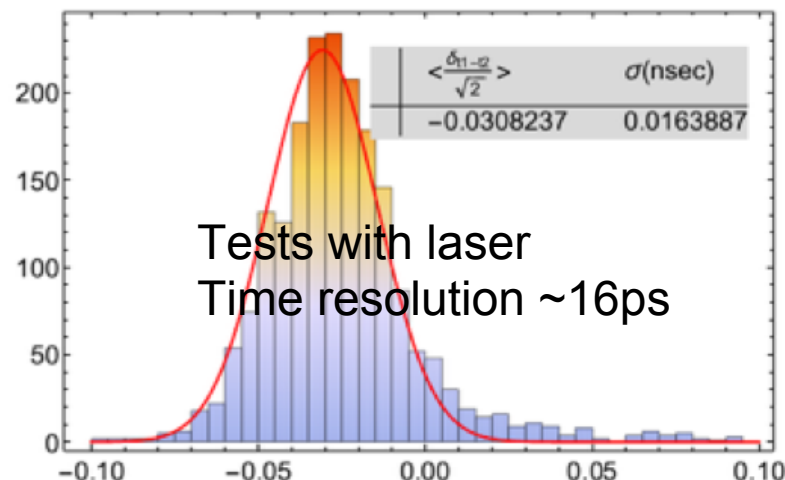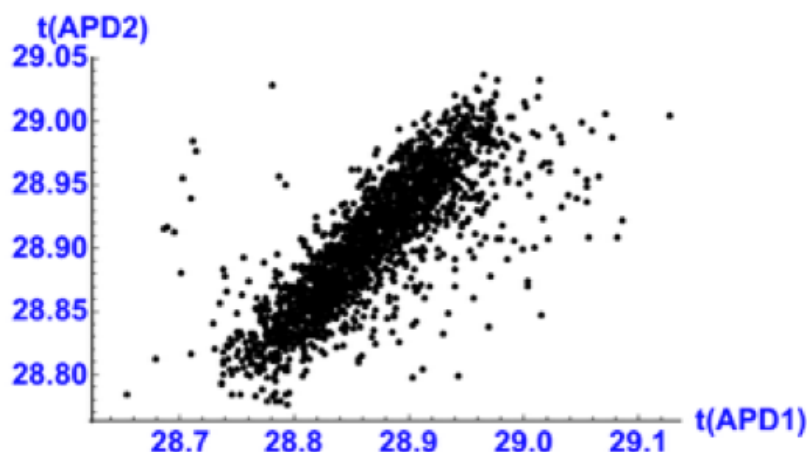

Timing system

- PPS will be integrated in the CMS Trigger Control and Distribution System (TCDS) as additional partition
- It requires a complementary timing system with low jitter (<1 ps) replica of master clock
 - System developed in CMS based on system at SLAC Linac Coherent Light Source (LCLS)
 - System developed in Totem (FAIR at GSI)

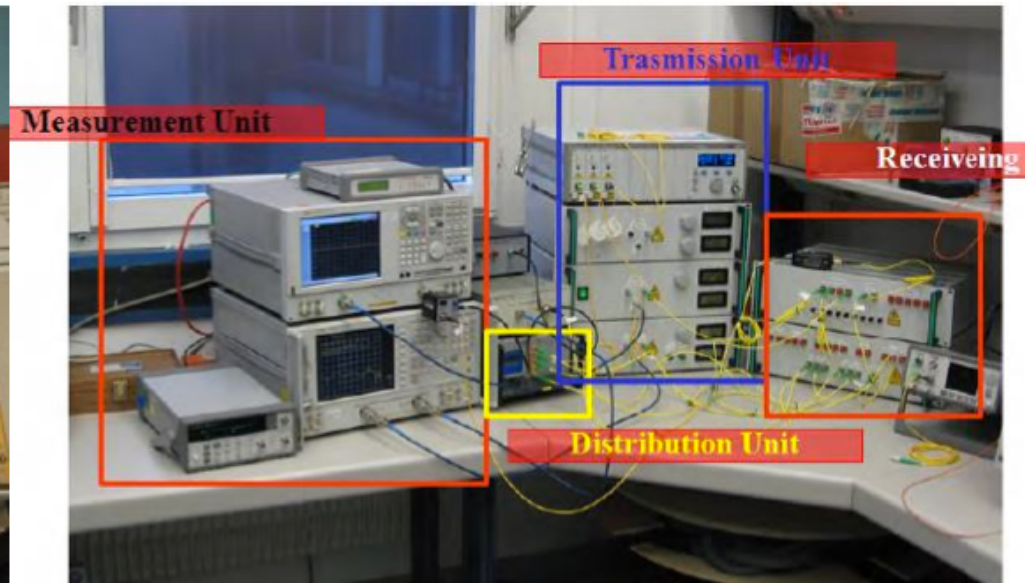


Trigger strategy

- Two photon physics

- Lepton final states captured by lepton triggers
- Trigger efficiency expected to be high, as lepton thresholds are 30 GeV or below
- Final states with hadronic decays of one W or one tau accessible using lepton+jet triggers

- Hadronic physics

- Large inclusive QCD jet background
- L1 timing trigger selecting events in the tails of the z-vertex distribution

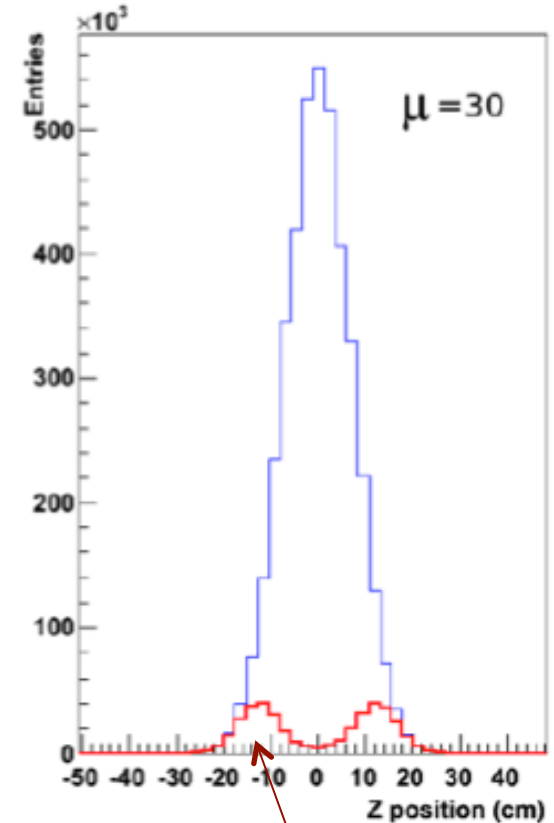

Planning

- Exploratory phase followed by a production phase until LS2
- Exploratory phase (2015-16)
 - Prove ability to operate detectors close to beam-line at high luminosity
 - Show that PPS does not prevent **stable operation** of LHC beams, does not affect **luminosity performance** of machine
- In 2015:
 - Evaluate RPs in 204-215 m region
 - Demonstrate timing performance of Quartic baseline
 - Use Totem silicon strip detectors
 - Integrate PPS detectors into CMS trigger/DAQ system
- In 2016:
 - Upgrade tracking to pixel detectors
 - Upgrade timing detectors if required/possible
 - Evaluate MBP option

Institutes and responsibilities

	Infrastructure	RP	MBP	Tracking sensors	Tracking readout	Timing sensors	Timing readout	Trigger & timing	Offline SW
CMS									
Belgium Louvain			x			x			x
Brazil UERJ CBPF					x		x		x x
CERN CMS TC group	x	x	x						
Italy Torino Genova			x	x x	x x	x			x
Iran Tehran			x				x		x
Portugal LIP						x	x	x	x
Russia IHEP Protvino						x			x
US Fermilab Livermore Kansas Iowa Rockefeller						x x	 x	x	 x
TOTEM									
CERN	x	x	x			x		x	x
Czech Republic Prague Pilsen	x	x				x		x	
Finland Helsinki						x			x
Italy (INFN) Bari Pisa/Siena	x x					x x		x x	x x
Collaboration CommonFund	x								

10 countries
20 institutes
93 people

Cost estimate

Cost of baseline detector: 550 kCHF

Area	Item	Cost (kCHF)
Tracking detector	Sensors	150
	Front-end electronics	60
	Back-end system	30
	Mechanics	10
	Services	20
Tracking detector total		270
Timing detector	Sensors & mechanics (Quartic)	40
	Front-end electronics	60
	Back-end system	30
	Services	70
Timing detector total		200
Timing & Trigger	Reference timing system	40
	Trigger system	40
Timing & Trigger total		80
Grand Total		550

RP expenditures in 2013-14: 438 kCHF

Area	Item	Cost (kCHF)
RP Infrastructure *)	Tracking RPs: Relocation of four RP stations. RP Faraday cages.	87
	Timing RPs: Two cylinder RPs stations. Prototype and final production. Movement system. Infrastructure (cables, cooling, vacuum, LV). Ferrites.	322
	Development	29
	RP Infrastructure total	438

*) Cost includes CERN services manpower

Cost of R&D prototypes: 400 kCHF

Area	Item	Cost (kCHF)
Timing detectors	High granularity Quartic	30
	Gastof prototypes *)	70
	Diamond prototypes	50
	Timing silicon prototypes	50
	Timing integrated electronics	50
Timing R&D total		250
Beam pockets	Moving Beam Pipe prototype mechanics	30
	MBP motorization (for one prototype)	50
	Two additional cylindrical RPs	70
Beam pockets R&D total		150
Grand Total		400

*) Cost corresponds to two detectors (2x 35 kCHF). The second detector will be built after results of the TB measurements

Schedule of construction


Timing detectors	
Before 16/01/2015	Complete module design. Order components.
Before 31/03/2015	Assemble prototype module at Fermilab. NINO boards delivered.
Before 17/04/2015	Deliver prototype module for beam tests.
Before 30/05/2015	Beam tests with a reference time counter.
Before 31/7/2015	HPTDC boards delivered.
Before 31/08/2015	Construct four modules and deliver to CERN.
Before 30/09/2015	Beam tests of four modules with readout electronics.
October 2015	Ready for installation.
Tracking detectors	
Before 15/2/2015	Pre-production of sensors at FBK and CNM.
Before 15/5/2015	Test of sensors. Final decision of manufacturer. Delivery of flex-hybrid pre-prod.
Before 15/7/2015	Launch production of final sensors. Delivery of the portcard pre-production.
Before 30/9/2015	Launch production of mechanical supports, flex-hybrids and portcards.
Before 15/12/2015	Delivery of final sensors, mechanical supports, flex-hybrids and portcards.
Before 30/1/2016	Delivery of bump-bonded detectors.
Before 30/3/2016	Ready for installation.

Summary

- PPS will allow precision proton measurement in the very forward region on both sides of CMS in standard LHC running conditions
- Studied physics and detector performance
 - Timing resolutions of 10ps and 30ps
 - Distance from beam at 15σ and 20σ
- Improves sensitivity to SM and BSM physics
- Tracking and timing detector options
 - Baseline vs R&D
- Exploratory/consolidation phase in 2015/2016
- Challenging small-scale project within short time range

backup

Organizational chart

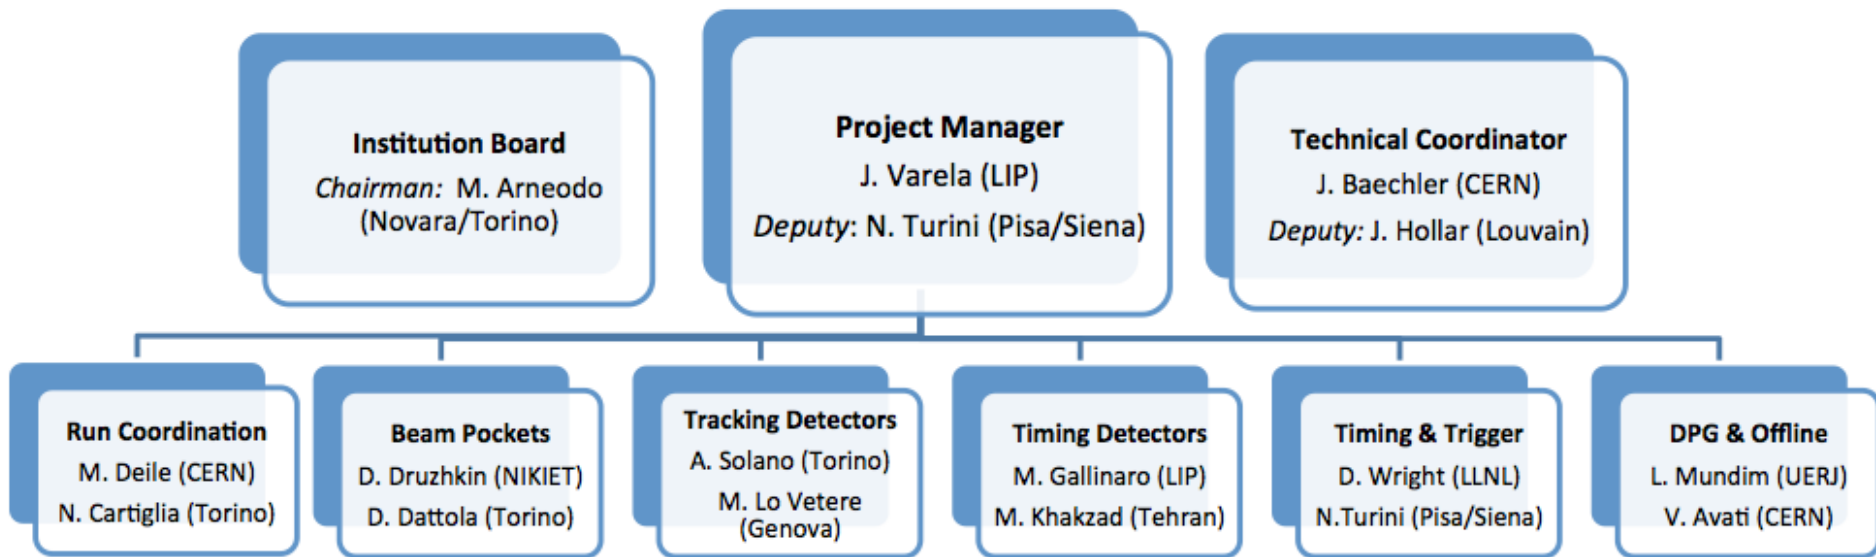

Machine induced backgrounds

- Use TOTEM data at $\mu=9$
- Account for pileup protons (from simulation) to estimate beam background only
- Extrapolate from $\mu=9$ to $\mu=50$

